

WO 01/20237 A1

COLD-STORAGE APPLIANCE

This invention relates to cold-storage appliances such as refrigerators and freezers for storing foodstuffs and other perishables. Other applications of the invention include
5 storage of chemicals and medical or biological specimens.

The invention can be applied equally well to storing any items within a cooled environment, such as in a refrigerated goods vehicle. The term 'appliance' is therefore to be construed broadly, extending beyond fixed domestic devices into industrial, scientific
10 and mobile applications. Nevertheless, the majority of this specification will describe domestic cold-storage appliances for storing foodstuffs.

The principal reason for storing foodstuffs in refrigerated conditions is to retard their degradation through microbial action or physiological or chemical changes, so that their
15 shelf-life is extended for as long as possible. In order optimally to extend shelf-life through refrigeration, several factors must be considered; for example, the most suitable temperature for storing the foodstuff. In addition, some foodstuffs degrade quickly under the attack of virulent microbes that are readily circulated to other foodstuffs stored nearby, causing cross-contamination. It has long been appreciated that it is desirable to segregate
20 different types of foodstuffs; accordingly, modern refrigerators are usually compartmentalised with the intention that the user will store similar types of food in each compartment.

As cold-storage appliances consume large amounts of power in use, energy efficiency is
25 also an important consideration when designing such appliances. In fact, this is becoming an increasingly important consideration for consumers when they buy electrical appliances such as refrigerators, freezers, washing machines and tumble driers: retailers have responded to this by displaying energy-efficiency ratings on the front of such appliances in their showrooms. Indeed, this an EU requirement.

30

The typical household refrigerator is an upright cabinet with a hinged door on its front. The door and cabinet form an airtight enclosure via a magnetic compressible seal. Substantially all of the interior of the cabinet defines a storage volume, most commonly

– 2 –

partitioned by a number of shelves. Access to all of the shelves is gained by opening the door, which is common to all shelves. The refrigerator also houses a cooler unit situated near to its top which cools the air circulating as a convection current in which the air cooled by the cooler unit sinks to the bottom of the refrigerator around the sides of the interior storage space, and as the air is warmed, it rises up through the centre of the interior back to the cooler unit where it is cooled, and so on *ad infinitum*.

To allow convection of the cool air around all of the refrigerator to ensure that all stored foodstuffs are chilled, the shelves are typically made of wire so that they offer little resistance to the circulation of air, whilst still being able to support the stored foodstuffs.

Upright freezers often follow this same basic design, although the cooler unit is used to chill the interior of the freezer to below zero Celsius. Upright refrigerators and freezers are often combined and sold as a single unit with a refrigerator occupying the top half of the cabinet and the freezer occupying the bottom half, or vice versa. As different temperatures are required for the two sections, they are partitioned by a solid divide and each section has its own door and cooler unit.

A major problem with upright refrigerators and freezers is the upright door. The coldest air will drop to the bottom of the refrigerator or freezer as it is more dense than warmer air. When the door is opened, this cold air flows freely out of the refrigerator or freezer to be replaced by warm ambient air flowing in at the top. Accordingly, whenever the door is opened, the rush of ambient air into the interior of the refrigerator or freezer causes its temperature to rise: this rise must be redressed by running the cooler unit and hence consuming more energy. Moisture in the incoming ambient air also gives rise to condensation and ice within the cabinet.

A further problem inherent in the upright door is its associated vertical seal. The coldest air that collects at the bottom of the refrigerator or freezer constantly seeks to escape through the sealing interface so that, if the seal forms an imperfect seal between the door and the cabinet, this air will escape.

- 3 -

A common alternative design of freezer is the chest freezer which, as its name implies, is an open-topped chest with a hinged lid closing its top. The interior of a chest freezer is usually partitioned using open wire walls or open wire baskets. As before, the walls or baskets are designed to allow cooled air to circulate freely throughout the freezer by convection.

The chest freezer helps to combat the problems of the upright refrigerator or freezer because its lid seal is not exposed to the coldest and densest air in the same manner. However, the chest configuration is inconvenient and wasteful of space because it precludes use of the space immediately above the freezer, which space must be preserved to allow the lid to be opened. Nor can items be left conveniently on top of the lid. It is also well known that large chest freezers can make access to their contents extremely difficult, it being necessary to stoop down and shift numerous heavy and painfully cold items to get to items at the bottom of the freezer compartment.

Moreover, both upright refrigerators and freezers and chest freezers suffer from a common disadvantage as follows. Generally, users want to access only one part of a refrigerator or freezer at a time. However, as there is generally only a single common door or lid for either a refrigerator or a freezer compartment, each time the door is opened the whole of its interior is exposed to warm ambient air, and so the whole of the interior must be cooled afresh at the expense of further energy consumption.

As mentioned above, segregation of different types of foodstuff is advantageous in avoiding cross-contamination. However, segregation of food is often compromised by the convection principle employed in most refrigerators. As the cooled air must chill the stored foodstuffs, it is circulated throughout the refrigerator. The substantially open baskets or shelves designed to promote circulation of air between the compartments unfortunately also promote the circulation of moisture and harmful bacteria. In addition, any liquid that may spill or leak from a foodstuff container will not be contained by the open partitions: this is particularly a problem for juices running from uncooked meats where the chances of contamination are high and the consequences of cross-contamination can be particularly severe.

- 4 -

As will be appreciated from the foregoing discussion, it is advantageous to divide a refrigerator into compartments, each with its own dedicated door or lid. Embodiments of this idea are disclosed in UK Patent Numbers GB 602,590, GB 581,121 and GB 579,071, all to Earle, that describe cabinet-like refrigerators. The front of the cabinet is provided with a plurality of rectangular openings for receiving drawers. Each drawer has a front panel larger than its respective opening so that a vertical seal is formed around the overlap when the drawer is in a closed position.

- 10 The drawers and their contents are cooled by a cooler unit that circulates cooled air by convection within the cabinet, in common with the types of refrigerator already described. To promote circulation of this air amongst all of the drawers, the drawers are open-topped and have apertures in their bottoms. Also, the drawers are disposed in a stepped arrangement, those at the top of the refrigerator extending back less far into the cabinet than the lower drawers so that the rear of each drawer is exposed to the downward flow of cooled air from the cooler unit.

Although only one drawer need be opened at a time, the apertures in the bottom allow cold air to flow freely from the open drawer, which is replaced by warm moist ambient air to the detriment of energy efficiency and with the increased possibility of cross-contamination. Indeed, when a drawer is opened, cold air within the cabinet above the level of that drawer will flood out, drawing ambient air into the cabinet. Furthermore, the drawers encourage ambient air to flow into the interior of the refrigerator because, upon opening, they act as pistons drawing the ambient air into the interior of the refrigerator cabinet. Once in the cabinet, the warm air can circulate as freely as the cold air that is supposed to be there.

Even when closed, the accumulation of cold air towards the bottom of the cabinet will exert increased pressure on the vertical seals of the lowest drawers, increasing the likelihood of leakage if the seal is faulty.

A further example of the above type of refrigerator is disclosed in UK Patent Number

- 5 -

- GB 602,329, also to Earle. The refrigerator disclosed therein suffers many of the above problems but is of greater interest in that a single drawer consisting of insulated sides and base is provided within the cooled interior of the cabinet. In contrast to the variants outlined above, the sides and base are solid and not perforated so that air cannot flow through them. When the drawer is closed, a horizontal member within the cabinet combines with the drawer to define a compartment, the horizontal member thus being a lid for the drawer. This compartment is provided with its own cooling coils situated just below the horizontal member.
- 10 Very little detail is given about the seal that is formed between the drawer and the horizontal member, other than that the horizontal member has a downwardly projecting rear end with a biased edge that makes a close fit with the rear wall of the drawer. Nothing else is said about the junction between the drawer and the horizontal member, apart from the general statement that the drawer is adapted when in its closed position to fit 'fairly snugly' against the horizontal member. It can only be inferred that the drawer and the horizontal member merely abut against each other. Whilst this will impede the passage of air into and out of the drawer, it will not form an impervious seal. As this is not a vapour seal, icing is likely to occur even when the drawer is closed.
- 20 The drawer arrangement described creates a compartment in which a different temperature can be set when compared to the essentially common temperature of the rest of the refrigerator. It is particularly envisaged that the drawer can act as a freezer compartment. The Applicant has appreciated a disadvantage in this arrangement, namely that as the freezer drawer resides within the cooled interior when closed, the outer surfaces of the drawer within the cabinet will be cooled to the temperature of the refrigerator. Accordingly, when the drawer is opened, those cooled outer surfaces will be exposed to ambient air containing moisture that will condense on the cooled surfaces leading to an undesirable accumulation of moisture. Condensation involves transfer of latent heat from water vapour to the drawer, thus increasing the burden of cooling the drawer again when the drawer is returned to the closed position within the cabinet.

Additionally, condensed moisture will be transferred to the interior of the refrigerator

- 6 -

when the drawer is closed. As discussed above, the presence of water promotes microbial activity. A further disadvantage of introducing water into the interior of the refrigerator is that it may freeze: this can be a particular problem where the drawer of the enclosed compartment meets the insulated top, as any ice formation will form a seal that locks the drawer in a permanently closed position. This disadvantage was appreciated by Earle, as a cam mechanism is included in his proposal to break any ice-formed seals. It is also possible for a build-up of ice to affect the sealing ability of the seal, by preventing mating sealing surfaces from mating correctly.

- Of course, the accumulation of ice on moving parts of the drawer mechanism is also undesirable as it will impede movement of the drawer.

It is against this background that the present invention has been devised. In a broad sense, the invention resides in a cold-storage appliance comprising:

- an open-topped insulating container defining an external surface;
- an insulating lid adapted to close the open top of the container;
- a cooling means adapted to cool the interior but not the exterior of the container;
- and
- a structure supporting the container, the lid and the cooling means;
- wherein the container is mounted to the structure for movement relative to the structure and the lid to open the container and afford access to its interior or to close the container, and wherein at least a majority of the external surface of the container is exposed to ambient air when the container is closed by the lid.
- By exposing the external surface of the container to warmer air than it contains, that surface is kept above the temperature at which significant condensation can occur. This is in contrast to the prior art where the external surface of a drawer within a cooled

- 7 -

compartment is exposed to ambient air only when the drawer is open, and so is inevitably cold enough to risk condensation when the drawer is opened. In the invention, there is no problem with condensation on the external surface, and hence no problem with latent heat transfer to the container or the icing and cross-contamination difficulties of condensed water within the appliance. Indeed, the external surface of the container does not undergo any significant temperature rise when the container is moved and hence opened.

The invention thus provides a cold-storage appliance having an ambient-exposed surface area enclosing a cooled compartment, in which a majority of that surface area moves upon opening the compartment whereas a minority of that surface area remains stationary. This may be contrasted with the prior art in which a majority of the ambient-exposed surface area remains stationary when the compartment is opened by moving a minority of that surface area. In that sense, the invention goes directly against conventional wisdom.

It is preferred that movement of the container with respect to the structure and the lid includes a major generally horizontal component of movement, to which end the container may be mounted to the structure by means running along at least one generally horizontal track. Such a track suitably includes rails, which rails are advantageously telescopic.

Further or in the alternative, the container can be supported by wheels or rollers running along a generally horizontal support surface.

In any case, to aid seal operation, movement of the container with respect to the structure and the lid preferably includes a minor generally vertical component of movement when the container is near to the lid. More specifically, the container advantageously lifts against the lid upon closing and drops away from the lid upon opening. The track or support surface may, for example, include a ramp effecting this vertical component of movement.

For optimum sealing, the apparatus preferably includes horizontal seal means that seal the container to the lid when the container is closed. The seal is advantageously compressible and may operate magnetically, for example electro-magnetically. The seal could alternatively be of hydraulic or pneumatic type.

- 8 -

To solve the problem of condensation as effectively as possible, it is preferred that substantially all of the external surface of the container is exposed to ambient air when the container is closed. The external surface may comprise a plurality of surface portions, such as are defined by bottom and side walls of the container. For example, the container may be generally cuboidal for best use of space.

In an elegant arrangement, the cooling means is associated with the lid and more preferably is integral with the lid. Cleaning is eased if the cooling means is substantially flush with the underside of the lid.

The appliance preferably further includes shut-down means for shutting down the cooling means when the container is not closed. This saves energy. The shut-down means may, for example, include a switch closed by presence of the container so that the user does not have to remember to operate the shut-down means every time the container is opened or removed from the structure.

Further to improve energy consumption and to minimise cooling of ambient air within the appliance, a retractable screen is preferably provided being extensible across and suitably beneath the cooling means when the container is open. For example, the screen may be furled on a roller when retracted, and is preferably heat-reflective.

For automatic extension and retraction, the screen may be attached at one end to the structure and at an opposed end to the container or to means such as a cradle associated with the container, and is advantageously biased into a retracted configuration. If attached to the container, the screen should preferably be attached to the container in a removable manner so that the container can be removed from the appliance. In that event, the appliance suitably includes a retaining means for retaining the screen in a wholly or partially extended configuration when the screen is detached from the container. However, where means such as a cradle is employed, the screen can remain attached to the cradle even when the container is removed from the appliance.

– 9 –

To remove water or ice from the screen, a wiper or scraper may be provided. The wiper or scraper is suitably operable during retraction of the screen.

For optimum flexibility of storage use, it is much preferred that the cooling means is adjustable so that the same container can be used to chill or to freeze.

The structure of the appliance may be a cabinet and/or may include a frame. The appliance can be adapted to be built-in between cupboards or other structures, for example by the removal of decorative side panels. In any event, it is preferred that the structure and/or any surrounding structure defines at least one ambient air circulation channel around the external surface of the closed container.

Means may conveniently be provided to draw in ambient air from the front of the appliance, and/or to exhaust ambient air to the front of the appliance. To this end, the structure can define a front panel including at least one opening for admission or expulsion of air. This front panel preferably further comprises control and/or display means.

For optimum circulation, the appliance preferably further comprises an impeller for promoting admission and exhaustion of ambient air.

It is preferred that the container is removable from the structure, so that the container can be removed for cleaning or so that it can be taken away from the appliance with its chilled or frozen contents still inside. In that latter event, an auxiliary insulated lid or cover is preferably attachable to the container upon its removal from the structure. The removed container can be used on a picnic, for example, or may be used in conjunction with a replacement container when there is a need for temporary additional cooled storage.

To afford access to a container from different sides of the appliance, the container can advantageously be moved with respect to the structure in a plurality of different directions to open the container.

To segregate and organise the interior of a container for storage of different items, means

- 10 -

such as partitions, boxes and shelves can be provided to divide the interior of the container.

5 In preferred embodiments, the appliance of the invention has a plurality of containers, each having an associated lid and cooling means. In that case, it is much preferred that the cooling means are independently controllable so that each compartment can be set to a temperature appropriate to its contents, and preferably so that the ratio of chilled to frozen storage space can be varied at will simply by adjusting the temperature of a compartment above or below a threshold of, say, zero Celsius. Whilst it is simplest if the respective
10 cooling means are connected to a common refrigerator engine, it is possible to have a plurality of refrigerator engines. For example, it would be possible to have an individual refrigerator engine for each compartment.

15 To emulate the space efficiency, familiarity and convenience of upright refrigerators and freezers but without suffering their numerous disadvantages as discussed above, the containers are preferably stacked one above another. The containers are suitably of different interior sizes, shapes or volumes.

Viewing means may be provided to assist a user in viewing the contents of a container.
20 For example, a window may be provided in the front and/or bottom of a container, or a suitably-angled mirror can be placed above the container when open.

The already minimal risk of cross-contamination between compartments can be reduced almost to zero by including means for preventing opening of a container when another
25 container is open.

Where the appliance includes structures such as a track, a support surface or a retracted screen, it is preferred that these structures are exposed to ambient air so that there are no problems with icing.
30

In order that the invention can be more readily understood, reference will now be made, by way of example only, to the accompanying drawings in which:

Figure 1 is a front view of a refrigerator/freezer appliance according to an embodiment of the invention, showing a vertical array of drawers each including a bin;

5

Figure 2 is a side view of the appliance of Figure 1, with a lower portion of a side panel removed so that the sides of the drawers can be seen;

Figure 3 is a section along line III-III of Figure 2 but with the drawers closed;

10

Figure 4 is a section along line IV-IV of Figure 1;

Figure 5 is an enlarged schematic sectional side view of two drawers of the appliance of the preceding drawings, showing one way of mounting the drawers to the appliance;

15

Figure 6 is an enlarged schematic sectional side view of two drawers of an appliance in accordance with the invention, showing another way of mounting the drawers to the appliance and a way of mounting bins removably to the drawers;

20

Figure 7 is a plan view of a bin and lid of Figure 6 showing the disposition of rollers and grooves used to mount the drawers to the appliance;

Figure 8 is an enlarged schematic detail view of portions of two drawers of an appliance in accordance with the invention, showing yet another way of mounting the drawers to the appliance and of mounting bins removably to the drawers;

25

Figures 9(a), 9(b) and 9(c) are a sequence of sectional schematic side views showing a variant in which a drawer is opened by opening a hinged door on the front of the appliance, the door being linked to the drawer to pull the bin forward as the door opens;

30

– 12 –

Figure 10 is a sectional schematic side view showing another variant in which drawers are mounted on inclined supports so that gravity assists closing and sealing;

5 Figures 11(a), 11(b), 11(c) and 11(d) are sectional schematic side views of a variant in which a crank assists lifting a bin into sealing engagement with a top seal as the drawer is closed, Figure 11(a) being a general overview and Figures 11(b) to 11(d) being a sequence of enlarged detail views showing the interaction of the crank and the bin as the drawer moves rearwardly;

10

Figure 12 is a schematic side view of a variant akin to the variant of Figure 10 but employing a horizontal rail and an inclined evaporator cooling means;

15

Figures 13(a) and 13(b) are sectional schematic plan and front views respectively showing a variant employing side seals between a bin and a lid;

20

Figures 14(a) and 14(b) are sectional schematic side views, Figure 14(a) being a general overview and Figure 14(b) being an enlarged detail view, showing a dual-action scraper to remove ice or moisture from an evaporator during both opening and closing of a drawer;

25

Figure 15 is a sectional schematic side view of a further scraper variant, in this case employing deformation of a flexible membrane to promote the removal of ice and moisture from the evaporator;

30

Figure 16 is a sectional schematic side view showing a defrost tray that sits in a bin when a drawer is left partially closed to defrost the evaporator, the tray thereby catching moisture dripping from the evaporator;

Figure 17 is a sectional schematic side view showing a fan coil cooling arrangement applied to a bin, which may similarly be applied to a plurality of bins;

– 13 –

Figure 18 is a sectional schematic front view through a bin of another variant and its lid, showing how the lid includes a dished evaporator promoting drainage of moisture into drainage gutters around the upper peripheral wall of the bin;

5 Figures 19(a) and 19(b) are schematic sectional and plan views respectively of the lid of the variant shown in Figure 18; and

10 Figures 20(a), 20(b) and 20(c) are schematic views of a scaled-up extension of the inventive concept, being applied to bulk storage in a cold store and commercial transportation in a refrigerated vehicle.

Figures 1 to 4 show a refrigerator/freezer appliance 2 according to an embodiment of this invention. The appliance 2 is of upright cuboidal configuration, and comprises five rectangular-fronted drawers 4 arranged one above another and housed in a cabinet 6
15 comprising top 8, bottom 10, side 12 and rear 14 panels. Any of these panels can be omitted if it is desired to build the appliance 2 into a gap between other supporting structures; in particular, the side panels 12 can be omitted if neighbouring cupboards can be relied upon for support or otherwise to perform the function of the side panels 12. The panels 8, 10, 12, 14 may or may not be structural but if they are not, a frame (not shown)
20 provides support for the various parts of the appliance. If a frame is provided, it is structurally unnecessary to have panels.

The drawers 4 can be slid horizontally into and out of the cabinet 6 by means of tracks on the sides of the drawers 4 that will be described in more detail below. If there is no back
25 panel 14, it is possible for a drawer 4 to be removed from the cabinet 6 in more than one direction, as shown in Figure 2.

Each drawer 4 comprises an insulated open-topped bucket-like container 16, at least one container 16 (in this case, that of the central drawer 4) being of a different depth to the
30 other containers 16 to define a different internal volume. These containers 16 will be referred to in this specific description as bins 16. The bottom bin 16 leaves only a narrow gap to the bottom panel 10 of the cabinet 6, whereas the top bin 16 leaves a substantial

– 14 –

space at the top of the appliance 2 under the top panel 8, allowing room for a compartment 18 that accommodates a refrigerator engine 20, for example including condenser and compressor means as is well known.

- 5 The relatively deep bin 16 of central drawer 4 is intended to hold bottles and other relatively tall items stored upright, whereas the other, relatively shallow bins 16 are for correspondingly shallower items. Compared to the shelves and other compartments defining the main storage volume of a conventional upright cold-storage appliance, all of the bins 16 have a favourable aspect ratio in terms of the substantial width of the access
10 opening compared to the depth of the compartment thereby accessed. It is therefore very easy to reach every part of the interior of a bin 16 when a drawer 4 is opened,

The interior of the cabinet 6 is divided by five insulated lids 22, one for each drawer 4, that are generally planar and horizontally disposed. When a drawer 4 is closed, the open top of
15 its associated bin 16 is closed by an appropriate one of the lids 22 in a manner to be described. The lids 22 include cooling means 24 being evaporator elements of known type disposed in the lower face 26 of each lid 22 to cool the contents of a bin 16 closed by that lid 22.

- 20 Each bin 16 has a generally flat front face 28 that is exposed when the drawer 4 is closed. The front face 28 could be provided with a decorative panel as is well known. When the drawer 4 is closed, the front face 28 of the bin 16 is bordered at the top by a control and display panel 30 dedicated to that bin 16, the panel 30 being co-planar with the front face 28. The panel 30 is supported by the front edge 32 of the appropriate lid 22, the panel 30
25 being recessed into the front edge 32 of the lid 22.

The control and display panel 30 contains a number of displays, switches and audible alarms, thus providing a user interface for each bin 16. For example, the interface will most commonly be used for selecting the temperature to which the bin 16 is to be cooled,
30 but also contains temperature displays, on/off and fast-freeze switches, a light indicating when the drawer 4 is open and an audible alarm to indicate when the drawer 4 has been open longer than a predetermined time or when the temperature inside the bin 16 has

- 15 -

reached an upper or lower threshold.

A rounded handle 34 extends across substantially the entire width of the top portion of the front face 28 to enable the drawer 4 to be pulled out when access to the interior of the bin 16 is required.

The bottom of the front face 28 of each bin 16 is bordered by a slot 36 that, as will be described, admits ambient air into the cabinet 6. To do so, each slot 36 communicates with an air gap 38 extending beneath the entire bottom face 40 of the associated bin 16 to meet a void 42 maintained behind each bin 16, the void 42 being defined by the inner surfaces of the back 14 and side 12 panels of the cabinet 6 and the backs 44 of the bins 16. As can be seen particularly from Figure 4, the void 42 extends behind each bin 16 from the base panel 10 of the cabinet 6 to communicate with the refrigerator engine compartment 18 at the top of the cabinet 6.

The air gaps 38 beneath the bins 16 and the void 42 behind the bins 16 also communicate with air gaps 38 to the sides 48 of the bins 16. Optionally, vents 46 are provided in the side panels 12 of the cabinet 6 adjacent to the bins 16 through which ambient air can also be admitted. As best illustrated in Figures 3 and 4, air gaps 38 extend around all bar the top side of each bin 16, so that ambient air entering the cabinet 6 through the slots 36 can circulate freely around the sides 48, bottom 40 and rear 44 of each bin 16. It will also be noted that ambient air can circulate freely over the top surface 50 of each lid 22. To allow this airflow over the uppermost lid 22, which does not have a bin 16 above, a slot 36 is provided under the front face 52 of the refrigerator engine compartment 18.

It will be noted that the piston action created by opening a drawer 4 that sucks ambient air into the interior of the appliance 2 does not pose a problem in this invention. In fact, this action is advantageous as it promotes circulation of ambient air within the cabinet 6.

Figure 4 shows that the refrigerator engine compartment 18 includes an impeller 54 exhausting through apertures 56 provided in the front face 52 of the refrigerator engine compartment 18. As best seen in Figure 1, these apertures 56 extend horizontally across

– 16 –

the width of the front face 52. The impeller 54 communicates with the void 42 behind the bins 16 to draw air from the void 42, thus continuously promoting the induction of ambient air through the slots 36 and the optional side vents 46. Upon entering the refrigerator engine compartment 18, this air is drawn through the heat-exchange matrix 58
5 of the condenser.

Accordingly, ambient air entering the cabinet 6 through the front slots 36 and, if provided, the side vents 46, leaves the cabinet 6 through the apertures 56 provided in the front face 52 of the refrigerator engine compartment 18, and so ambient air is circulated through the
10 cabinet 6. More specifically, ambient air enters the appliance 2 where it immediately comes into contact with the outer surfaces 40, 44, 48 of the bins 16 and warms them to ambient temperature (or substantially so) before being drawn towards the void 42 and then upwards through the void 42 by the circulation of the air. The arrows of Figure 4 demonstrate this circulation of air through the appliance 2. Accordingly, the interior of the
15 cabinet 6 is kept close to ambient temperature, and only the interior of each bin 16 is cooled.

By exposing the external surfaces 28, 40, 44, 48 of the bin 16 to warmer air than it contains, there is no problem with condensation on the external surfaces 28, 40, 44, 48,
20 and hence no problem with latent heat transfer to the bin 16 or the icing and cross-contamination difficulties of condensed water entering the cabinet 6.

In any event, cross-contamination would be unlikely to occur because each bin 16 is tightly sealed when its drawer 4 is closed. So, even if microbes enter the cabinet 6, they
25 cannot readily gain access to other bins 16. It is also unlikely that two bins 16 would be open together at any given time. It would be possible to include means for enforcing this, for example using a mechanism akin to that used in filing cabinets for anti-tilt purposes, by preventing more than one drawer 4 being opened at a time.

30 When a bin 16 is open, its open top does not suffer much spillage of cold air, and when a bin 16 is closed, the horizontal seals 60 apt to be used in the invention are inherently better at sealing-in cold air than the vertical seals commonly used in upright refrigerators and

– 17 –

freezers. Whilst horizontal seals are known in chest freezers, this invention does not suffer the inconvenience and space problems of chest freezers, instead being akin in those respects to the much more popular upright appliances.

- 5 As there has to be a large temperature gradient between the cooled inner surfaces 62 of each bin 16 and its outer surfaces 28, 40, 44, 48, the bins 16 are constructed from an efficient insulating material so that the gradient is easily maintained with the outer surfaces 28, 40, 44, 48 remaining at, or close to, the ambient temperature. Materials such as phenolic foam or polyurethane foam (optionally skinned with GRP or a polycarbonate in a
10 composite structure) are particularly preferred for the construction of the bins 16.

- If segregation of the contents of a particular bin 16 is required, that bin 16 may be fitted with removable inserts 64. The inserts 64 are of varying shape and dimensions and may be used to define many types of compartments. For instance, an insert 64 may be a thin
15 partition with a length corresponding to the length or width of the bin 16 in which it is received. An insert 64 may be a box, with or without a lid, or an insert 64 may include clips for holding bottles in place or trays for holding eggs or the like. An insert 64 could also be a wire basket or shelf.

- 20 As can be seen in Figure 2, one or more of the bins 16 can be removed from the appliance 2 and fitted with an insulated cover 66. The bin 16 may then be taken away from the appliance 2, its insulated construction ensuring that it keeps its contents cool for a limited period of time. For instance, the bin 16 may be used as a cool-box, possibly in conjunction with ice-packs to keep the interior cool for as long as possible. Alternatively, the bin 16
25 with cover 66 may be kept close to the appliance 2 to provide added temporary cooled storage capacity, further bins 16 being fitted to the appliance 2 in that event.

It is also possible for a cover 66 to include a fridge engine powered internally by batteries or a gas supply or externally by mains electricity or a vehicle electricity supply.

30

The drawers 4 and the interaction between the bins 16 and the lids 22 are shown in more detail in Figures 5, 6 and 7. Figure 5 illustrates the drawers 4 of the embodiment described

- 18 -

above with reference to Figures 1 to 4, whereas Figures 6 and 7 describe an alternative arrangement. Their common features will be described now and their differences will be discussed later.

5 Figures 5, 6 and 8 show clearly how, when a drawer 4 is in a closed position, the associated lid 22 closes the open top of the bin 16. A compressible seal 60 is provided under the lid 22, which seal 60 corresponds in size and position to the top edge 68 of the bin 16 that lies directly beneath the seal 60 when the drawer 4 is closed. The seal 60 can have magnetic qualities, for example being electro-magnetically operable, or may employ
10 hydraulics or pneumatics as aforesaid. When the bin 16 is closed, the bin 16 compresses the seal 60 to form an airtight seal between the lid 22 and the bin 16. To do so, the bin 16 moves upwardly during the final part of a closing movement. The main differences between Figure 5 on the one hand and Figures 6, 7 and 8 on the other hand lie in how this upward movement is achieved.

15

Figures 5 and 6 also show how the bottom of the lid 26 houses a heat exchanger 24 for cooling the interior of the bin 16. The heat exchanger 24 is positioned centrally with respect to the bin 16 beneath and occupies much of the underside area of the lid 22. The bottom surface of a heat exchanger 24 is flat and generally co-planar with the surrounding
20 bottom surface of the lid 26, ensuring that the entire bottom surface of the lid can be wiped clean easily.

The heat exchanger 24 is controlled by a control element on the control and display panel 30 that is recessed into the front edge 32 of the lid 22, by which the selected temperature is
25 set, and the heat exchanger 24 works accordingly. A temperature sensor is provided (not shown) operating via a feedback loop in well-known manner to alter the operation of the heat exchanger 24 as required to maintain the selected temperature. The heat exchanger 24 is connected to the refrigerator engine 20 that is also connected to all the other heat exchangers 24 of the appliance 2, the system being provided with valve means under
30 control of the various control elements to adjust the cooling effect of each heat exchanger 24 as may be necessary to achieve the operation selected by a user.

- 19 -

It will be realised that each bin 16 comprises a separate independent cooled storage area. Accordingly the temperature can be set independently so that, if desired, a different temperature can be set for each bin 16. In fact, temperatures can be set below 0°C, so that a bin 16 can be used as a freezer or as a refrigerator at the user's option. In this way, the appliance 2 may function as a combined refrigerator and freezer where, advantageously, the ratio of refrigerated storage space to frozen storage space can be varied easily by changing the use of one or more of the bins 16. Of course, it will be appreciated that the drawers 4 can all be used as refrigerators or can all be used as freezers so that, in effect, the appliance 2 becomes either a dedicated refrigerator or freezer.

It will also be seen from Figures 5 and 6 that a screen 70 is provided for each drawer 16, the screen 70 being made from a thin flexible sheet material. The purpose of the screen 70 is to underlie the otherwise exposed heat exchanger 24 and the rest of the cold bottom surface 26 of the lid 22 when the drawer 4 is open. This is intended to prevent, as much as possible, warming of the bottom surface 26 of the lid 22 or cooling of the substantially ambient-temperature air within the cabinet 6.

In the embodiments illustrated, as a drawer 4 is closed, the screen 70 is a flexible sheet that rolls itself onto a reel 72, so that it can be stored compactly within the ambient-exposed void 42 at the rear of the bins 16. Each reel 72 is positioned adjacent to the lower rear edge of each lid 22, each reel 72 and its associated screen 70 extending across the width of the lid 22.

The front edge 74 of each screen 70 is removably attached to the upper part of the rear face 44 of the associated bin 16 so that when a drawer 4 is opened, the screen 70 is drawn forward with the bin 16. When the drawer 4 is opened, the screen 70 unrolls from the reel 72 to form a flat surface directly underneath the lid 22. When the drawer 4 is returned to its closed position, the screen 70 is taken up its reel 72 as aforesaid, for which purpose the reel 72 is biased in the rolling-up direction.

Accordingly, only a small volume of air occupies the gap between the lid 22 and the screen 70, which is advantageous as this air will be cooled by proximity to the lid 22. The

- 20 -

screen 70 is preferably made of silvered or otherwise reflective plastics to suit its purpose of preventing heat transfer from the warm ambient air in the large void left by an open drawer 16 to the small volume of cold air between the screen 70 and the heat exchanger 24. Consequently, when the drawer 4 is returned to its closed position, only a very small
5 volume of cooled air remains in the cabinet 6 when compared with the much larger volume of warm ambient air, causing only a negligible drop in temperature that is soon redressed by the resumption of ambient air flow into the cabinet 6.

Although designed to be heat-reflective and insulating, the underside of a screen 70 is
10 likely to cool to some extent when the associated drawer 4 is opened. This may cause condensation or icing on the underside of the screen 70. To remove any such condensation or ice, a scraper 76 in the form of a plastics blade presses against the screen 70 where it is taken up onto the reel 72. When the drawer 4 is closed, the screen 70 runs over the scraper 76 and any condensed water or ice runs down the underside of the scraper 76 to be
15 collected in a drain 78.

There is a minor difference in this respect between Figure 5 and Figures 6 and 8 in that Figure 5 shows the scraper 76 and drain 78 but Figures 6 and 8 do not. However, as will be clear, the scraper 76 and drain 78 could equally well be applied to the embodiments of
20 Figures 6 and 7 and Figure 8 if needs be.

Further to minimise loss of cold air and cooling of ambient air, shut-down means are provided to switch off a heat exchanger 24 when the associated drawer 4 is open. These means can include a contact switch (not shown) positioned at the rear of the lid 22 so that
25 the back 44 of a bin 16 presses against the switch to close the switch when the drawer 4 is closed. When the drawer 4 is opened, the contact is broken and the heat exchanger 24 is switched off until the drawer 4 is closed once more. This facility is particularly useful when a bin 16 is removed from the appliance 2 for a period of time, so that the user does not have to remember to turn off the associated heat exchanger 24.

30

Referring now to the features specific to the embodiment of Figures 1 to 5, the mechanism for opening and closing a drawer 4 comprises a pair of rails 80, 82 provided on each side

- 21 -

48 of a bin 16 to hold the bin 16 when the drawer 4 is open. The rails 80, 82 are attached to the side panels 12 of the cabinet 6 and are disposed one above another on each side of the bin 16 as best shown in Figure 3.

5 Four wheels 84, 86 are mounted to the sides 48 of the bin 16 to engage with the respective rails 80, 82. These wheels 84, 86 are only shown on the lower bin 16 of Figure 5 and are disposed in two pairs, one front pair 84, and one rear pair 86, the front pair 84 being at a lower level than rear pair 86 so that the rear pair 86 engages the upper rails 80 and the front pair 84 engages the lower rails 82. Only one wheel of each pair 84, 86 can be seen in
10 the side view of Figure 5.

The lower rails 82, at least, are telescopic so as to remain engaged with the front wheels 84 when the drawer 4 is open. All of the rails 80, 82 terminate at their rear ends in an elevated portion 88 behind a ramp 90 whereby, when a drawer 4 is being closed, the wheels 84, 86
15 travel rearwardly along the respective rails 80, 82 and up the ramps 90 onto the elevated portions 88. In this way, the bin 16 moves upwardly near the end of its horizontal rearward travel so that its top edge 68 is forced upwards to compress the associated seal 60. Conversely, when the wheels 84, 86 travel forwardly along the rails 80, 82 as the drawer 4 is being opened, the wheels 80, 82 travel back down the ramps 90 to clear the bin 16 from
20 the seal 60.

The bin 16 optionally also includes four lower wheels 92, 94 mounted at the bottom 40 of the bin 16. These lower wheels 92, 94 are again only shown on the lower bin 16 of Figure 5 and are disposed in two pairs, one front pair 92 and one rear pair 94. As before, only one
25 lower wheel of each pair 92, 94 can be seen in the side view of Figure 5.

The lower wheels 92, 94 run upon a supporting surface being the top of a lid 22 beneath or, in the case of the bottom drawer 4 that does not have a lid 22 beneath, the top surface of the base panel 10.
30

When a drawer 4 is being closed, the lower wheels 92, 94 travel rearwardly along the supporting surface. When the drawer 4 is almost closed, each wheel 92, 94 travels up a

- 22 -

ramp 96 (only a rear ramp 96 can be seen in Figure 5), supporting the upward movement of the bin 16 near the end of its horizontal rearward travel.

Turning now to the embodiment shown in Figures 6 and 7, many features are shared with the embodiment of Figures 1 to 5 and so like numerals are used for like parts. As before, telescopic rails 100 support the opened drawer 4 but, in this instance, the rails 100 are adapted to permit removal of a bin 16 from the appliance 2. To this end, the bins 16 are provided with two lugs 102 on each side that are received within two correspondingly-shaped slots 104 in the rail 100. The lugs 102 and slots 104 extend vertically and have a rounded bottom edge 106 : the rounded bottom edge 106 of the lug 102 assists in locating the lugs 102 into the slots 104 when a bin 16 is being returned to the appliance 2.

The telescopic rails 100 are of a two-piece construction. An outer rail 108 is attached to the adjacent side panel 12 of the cabinet 6 and so remains stationary in use, whilst an inner rail 110 that includes the slots 104 travels back and forward as the drawer 4 is opened and closed. As the rails 100 reside within the interior of the cabinet 6 that remains at or near to the ambient temperature, there is no problem of ice formation that could jam the sliding movement of the rails 100.

When a drawer 4 is fully or partially closed, its bin 16 is also supported from below by four rollers 112, 114 mounted on top of the lid 22 beneath the bin 16, except in the case of the lowest drawer 4 where the rollers 112, 114 are mounted on top of the bottom panel 10 of the cabinet 6, immediately beneath the lowest drawer 4. The rollers 112, 114 are of a diameter sufficient to span the air gap 38 beneath each bin 16, and are disposed in two pairs, one front pair 112 and one rear pair 114.

As seen in the plan view of Figure 7, the front pair of rollers 112 are relatively close together and are aligned with parallel grooves 116 provided in the underside 40 of the bin 16, the grooves 116 extending from the back edge of the underside 40 to near the front edge of the underside 40, terminating in an inclined end face 118. The grooves 116 receive the front pair of rollers 112 when the drawer 4 is open, as shown in the lower drawer 4 of Figure 6. It will also be noted that the bin 16 is clear of the rear pair of rollers 114 in this

- 23 -

position. As none of the rollers 112, 114 bear against the bin 16 in this position, its weight is supported fully by the rails 100 and the lugs 102 are seated against the base of the slots 104.

5 When the drawer 4 is closed, the bin 16 travels horizontally backwards on its rails 100, initially without the rollers 112, 114 making contact with the underside 40 of the bin 16. When the drawer 4 is nearly closed, however, the rear rollers 114 make contact with the rounded lower rear edge 120 of the bin 16. The grooves 116 are of such a length that as the rear rollers 114 make contact with the lower rear edge 120 of the bin 16, the front rollers
10 112 make contact with the inclined end faces 118 of the grooves 116. Consequently, as the drawer 4 is pushed further back towards its closed position, the rounded lower back edge 120 of the bin 16 and the inclined end faces 118 of the grooves 116 ride up and over the rollers 112, 114 so that the bin 16 is lifted upwards. The lugs 102 ride up their slots 104 to permit this movement, whereupon the top edge 68 of the bin 16 is forced against the
15 compressible seal 60. In this position, the weight of the bin 16 and its contents is removed from the rails 100, the rollers 112, 114 bearing the weight instead.

In reverse, when the drawer 4 is opened, the bin 16 moves downwards and forwards as the lower rear edge 120 clears the rear rollers 114 and the front rollers 112 are received again
20 in the grooves 116. Once clear of the rollers 112, 114, the bin 16 supported on the rails 100 can travel freely to its fully open position with the support of the rails 100.

When the bins 16 are removed from and returned to the appliance 2, both operations are performed with the drawer 4 in its fully open position with the screen 70, if any, fully
25 extended. To allow removal of the bin 16, the front edge 74 of the screen 70 is disengaged from the bin 16 and is held by retaining means in the form of a clip or other suitable retaining formation (not shown) depending from the lid 22.

Referring now to the embodiment shown in Figure 8, many features are shared with the
30 embodiments of Figures 1 to 7 and so, again, like numerals are used for like parts. The embodiment of Figure 8 most closely resembles that of Figures 6 and 7, in that similar carriage and sealing mechanisms are used. This includes the inner 110 and outer 108 rails

- 24 -

of that embodiment.

The principal difference with the embodiment of Figure 8 is how the bins 16 are removably mounted to their associated drawers 4. It will be seen that the inner rails 110
5 are attached to side arms 122 of a cradle 124 that surrounds and embraces the lower portion of a bin 16, to which end the cradle 124 also has front and back retaining members 126 and base supports 128.

A bin 16 is installed into a cradle 124 when its drawer 4 is in its open position. The base 40
10 of the bin 16 rests on the supports 128 with the sides 44 of the bin 16 being retained within the retaining members 126 and arms 122. With the drawer in the open position, the bin 16 sits fully within the cradle 124 so that the top 68 of the bin 16 clears the seal 60 and so that the rollers 112 are received in the grooves 116.

15 As in the embodiment of Figures 6 and 7, the bin 16 travels rearward into the cabinet 6 when the drawer 4 is closed and, when nearly in its closed position, the passage of the rounded lower edge 120 of the bin 16 and the inclined end faces 118 of the grooves 116 over the rollers 112, 114 lifts the bin 16 up to compress the seal 60. As the bin 16 is lifted, it rises within the cradle 124 and is supported by the rollers 112, 114 alone.

20

Whilst a screen is not shown in Figure 8, this embodiment allows, advantageously, the front edge 74 of a screen 70 to be attached to part of the cradle 124 of its associated drawer 4. In this way, the screen 70 may be left attached to the cradle 124 at all times, irrespective of whether or not a bin 16 is still within the cradle 124, so that there is no need to engage
25 or disengage the screen 70 from the bin 16 whenever a bin 16 is placed in or removed from the drawer 4.

Figures 9(a), 9(b) and 9(c) show a variant of the invention in which a hinged door 130 defining the front wall of a drawer 4 of the appliance can be opened from the vertical to
30 the horizontal to allow the bin 16 to be slid forwardly and removed from the drawer 4 without lifting. The door 130 is hinged along its lower edge to swing down through 90° as shown in Figure 9(b) when a handrail 132 on the top front edge of the door 130 is pulled.

- 25 -

The drawer 4 can then be opened as normal by pulling on the handrail 132.

As before, the drawer 4 runs on telescopic rails 100 (only one being visible in side view) but, in this case, the forward end of each rail 100 carries a respective slotted guide 134 defining a slot 136 that extends up and down, orthogonally with respect to the telescoping direction of the rail 100. A link 138 is pivotally attached at a first end to the door 130 near the upper edge behind the handrail 132. The opposed second end of the link 138 is constrained to run in the slot 136 defined by the guide 134 so that when the door 130 is closed as shown in Figure 9(a), the second end lies at or near the bottom end of the slot 136 and when the door 130 is open as shown in Figure 9(b), the second end abuts the top of the slot 136. This abutment suitably prevents the door 130 opening beyond 90° and so holds the open door 130 horizontal in a manner capable of supporting the weight of a loaded bin 16 as shown in Figure 9(c).

As the second end of the link 138 moves upwardly along the slot 136 in the guide 134 while the door 130 opens, the link 138 pulls the guide 134, and hence the attached end of the rail 100, forwardly together with the bin 16 carried by the rail 100. This is shown in Figure 9(b). Nevertheless, forward movement of the bin 16 can continue as shown in Figure 9(c) which shows the bin 16 being removed simply by sliding it out from the extended rails 100, using the horizontal rear surface of the open door 130 as a support for the continued sliding movement of the bin 16.

Figures 10 and 11 show top-sealing variants in which further means are provided to assist compression of the seal 60 by lifting the bin 16 as it closes. The variant of Figure 10 also employs means to bias the drawers 4 into the closed position, both functions being performed elegantly in Figure 10 by using gravity to close the drawer 4 and to compress the seal 60. Specifically, the Figure 10 variant contemplates mounting the drawers 4 on inclined runners, rails or supports 140 that tilt downwardly towards the rear of the appliance so that the drawer 4 tends to slide rearwardly down the incline into the closed position. This incline (the steepness of which is much exaggerated in Figure 10 for the purposes of illustration) therefore serves to bias the drawer 4 from the open position of the lower drawer 4 of Figure 10 into the closed position of the upper drawer 4 of Figure 10.

- 26 -

It will also be noted from Figure 10 that the lid 22 and the opposed runners, rails or supports 140 are not parallel: the distance between them lessens going rearwardly, defining a rearwardly narrowing, tapering gap that accommodates the bin 16 when the
5 drawer 4 is closed as shown in the upper drawer 4 of Figure 10. The result is that although the bin 16 slides downwardly in absolute terms as it moves rearwardly, the bin 16 also moves relatively upwardly in relation to the lid 22 in a ramping or wedging action and so compresses the seal as the drawer 4 closes.

10 In the variant of Figures 11(a) to 11(d), a crank 142 assists lifting a bin 16 into sealing engagement with a horizontal top seal 60 as the drawer 4 is closed. The crank 142 associated with a particular drawer 4 is pivotally attached to the lid 22 of the drawer 4 below, and stands proud of the lid 22 near its rear end. More specifically, the crank 142 stands in the path of the bin 16 so as to engage the rear of a bin 16 as the associated drawer
15 4 nears its fully closed position.

As best shown in the enlarged views of Figures 11(b) to 11(d), the crank 142 is generally U-shaped and comprises an L-shaped actuating lever 144 attached at a pivot 146 to a lifting arm 148 that terminates in a roller 150 to complete the U-shape. The crank 142 is
20 biased into the upright position shown in Figures 11(a) and 11(b), in which the free end portion of the actuating lever 144 extends forwardly and the lifting arm 148 is correspondingly retracted parallel to both the free end portion of the actuating lever 144 and the upper surface of the lid 22. In that retracted state, the lifting arm 148 and its associated roller 150 lie close enough to the lid 22 to fit within a gap maintained under the
25 bin 16 by a forward roller 152. Consequently, the lower rear edge of a rearwardly-moving bin 16 can ride over the roller 150 when the lifting arm 148 is retracted. As it does so, the rear face of the bin 16 bears against the free end portion of the actuating lever 144 as shown in Figure 11(c), simultaneously causing the crank 142 to pivot and the lifting arm/roller 148/150 to rise out of the retracted position, thus lifting the bin 16 until the
30 drawer 4 is fully closed and the bin 16 is fully lifted as shown in Figure 11(d).

The variant of Figure 12 is akin to that of Figure 10 in that there is a tapering gap between

- 27 -

the lid 22 and the rails 100 moving rearwardly, but in this instance the rails 100 are horizontal and only the lid 22 is inclined. The result is that the bin 16 is wedge-shaped to wedge into the tapering gap as the associated drawer 4 is closed, thereby to compress a seal 60 between the lid and the bin 16. The seal 60 is kept compressed by a latch, catch or magnet that prevents the bin 16 moving away from the lid 22 until it is desired to gain access to the bin 16. Figure 12 contemplates magnetic seals supplemented by a catch 154 that engages the front lower edge of the bin 16 when the drawer 4 is closed.

A benefit of the variants of Figures 10 and 12 is that the incline of the lid 22 and hence of the evaporator cooling means 24 in the lid 22 promotes drainage of moisture condensing on the evaporator 24. A gutter 156 is shown in Figure 12 at the rear of the lid 22 below the evaporator 24 to channel water away from the evaporator 24 for removal through suitable drainage pipes (not shown).

Whilst generally horizontal top seals 60 between bin 16 and lid have been proposed in all of the foregoing embodiments, it is possible to employ generally vertical side seals in addition or in the alternative. Figures 13(a) and 13(b) show a preferred way of making side seals work effectively in the invention, by making the lid 22 fit within a surrounding rim portion 158 of the bin 16. As can be seen in the plan view of Figure 13(a), the lid 22 tapers toward the front and the rim portion 158 of the bin 16 is correspondingly shaped so that the bin 16 can move freely away from the lid 22 as the corresponding drawer 4 is opened, whereas the lid 22 is squeezed within the tapering sides of the rim portion 158 as the drawer 4 is closed. This compresses a side seal 160 around the vertical external side walls of the lid 22 or within the corresponding vertical internal side walls of the rim portion 158, effecting good sealing between the lid 22 and the bin 16 as the drawer 4 closes. Like the variant of Figure 12, the seal is kept compressed by a latch, catch or magnet (not shown) that prevents the bin 16 moving away from the lid 22 until it is desired to gain access to the bin 16.

Figures 14 and 15 show variants of the invention in which means are provided to remove ice or moisture from the exposed undersurface of the evaporator cooling means 24 in a lid 22.

The variant of Figures 14(a) and 14(b) employs a dual-action scraper comprising a pair of parallel oppositely-angled blades 162 fixed to the rear wall 164 of a bin 16 to present their respective scraper edges to the undersurface of the evaporator 24. As the blades 162 are oppositely angled with respect to the undersurface of the evaporator 24, the rear blade 162 of the pair removes ice or moisture from the evaporator 24 as the drawer 4 associated with the bin 16 is opened and the front blade 162 of the pair does likewise as the drawer 4 is closed. Ice or drips of moisture 166 scraped or wiped from the evaporator 24 fall into a drain pan 168 below the blades 162 from which they can be drained or left to melt and evaporate.

As in Figure 14, the further scraper variant of Figure 15 employs a drain pan 168 fixed to the rear wall 164 of a bin 16 that catches ice or water falling from a blade 162 also fixed to the rear wall 164 of the bin 16. A single blade 162 is shown, although a pair of blades 162 as used in Figure 14 is also possible. However, the Figure 15 variant differs fundamentally from the Figure 14 variant in that a flexible membrane 170 closely underlies the undersurface of the evaporator 24 so that the membrane 170 serves as the cooling interface between the evaporator 24 and the interior of a bin 16. Ice or water will therefore tend to collect on the membrane 170 rather than on the evaporator 24 itself. A roller 172 or other transverse rod is fixed to the rear wall 164 of the bin 16 along with the drain pan 168 and the blade 162 so as to travel with the moving drawer 4 in alignment with and opposed to the blade 162. The roller 172 is supported at its ends to lie between the evaporator 24 and the membrane 170 so as to peel the membrane 170 away from the evaporator 24 and to deform the membrane 170 locally in the region of the blade 162. This promotes the removal of ice and moisture from the membrane 170 by cracking off any ice and encouraging the formation of drips that run into the drain pan 168.

If and when the time comes to defrost the appliance of the invention, Figure 16 shows how a defrost tray 174 can be seated into the top of a bin 16 to catch moisture dripping from the evaporator 24. The tray 174 comprises a central recess 176 shaped to sit snugly into the open top of the bin 16, surrounded by a peripheral rim 178 that lies on top of the walls of the bin 16 to bear the load of the tray 174. It is envisaged that the tray 174 can be placed

- 29 -

on top of a bin 16 in this manner when the associated drawer 4 is open and the evaporator 24 has been switched off (preferably by a microswitch sensing the action of opening the drawer 4 as aforesaid), whereupon the drawer 4 can be partially closed to an extent necessary to align the tray 174 under the evaporator 24 but not so far as to trigger the microswitch and so to switch the evaporator 24 back on. The switched-off evaporator 24 then slowly defrosts and the tray 174 catches the resulting drips.

It will be noted from Figure 16 that the rim 178 at the rear of the defrost tray 174 is extended rearwardly and angled upwardly to define a scraper edge 180 that abuts the underside of the lid 22. The purpose of this feature is to scrape any moisture droplets remaining on the underside of the evaporator 24 when the drawer 4 is opened after defrosting. The tray 174 can then be removed and the water in the recess 176 poured away.

Figure 16 illustrates the further refinement of an absorbent pad 182 in the recess 176 of the defrost tray 124. This pad 182 absorbs free water in the recess 176 and so makes spillage less likely when the tray 174 is removed. The pad 182 could be of a heatable material so as to accelerate the defrosting process, and can be either pre-heated (preferably being of a microwave-heatable material) or heated *in situ* by electric or other heating elements.

Variations are also possible in the layout and nature of the cooling means and fridge engine. For example, as shown in Figure 17, the aforementioned evaporator 24 over each bin 16 can be replaced by a fan coil cooling arrangement in which air is supplied and extracted via a remote fan coil unit. Specifically, a heat exchanger 184 is cooled by a cooling system 186 to extract heat from air circulated by a fan 188. The cold air exhausting from the heat exchanger 184 is fed into the closed bin 16 and warmer air is extracted from the bin 16 by the fan 188 to be cooled by the heat exchanger 184 and recirculated. This is the system used in forced air circulation refrigerators and so-called 'frost free' freezers, and has the advantage that the majority of condensed water and ice can be dealt with outside the cooled compartment. For example, the heat exchanger 184 may employ an automatic defrost facility in which moisture drips into a drain tray 190 under the heat exchanger 184 when the heat exchanger 184 is shut down periodically. Potentially, therefore, features such as the scraper blades 162 and defrost tray 174 of the

– 30 –

preceding variants can be eliminated.

Whilst shown applied to a single bin 16 in Figure 17 for clarity, a fan coil cooling arrangement may similarly be applied to a plurality of bins 16. The bins 16 can be
5 connected by a common manifold and share the same circulating air, but for reasons of cross-contamination it is preferred that each bin 16 has a separate circulation path although these can share a common heat exchanger. However, wholly separate circulation paths would aid the preferred objective of independent temperature control in each bin 16.

10 Figures 18 and 19 show another variant in which a bin 16 and its lid 22 are adapted to promote drainage of condensation from the evaporator 24. To this end, as best shown in Figure 19, the evaporator 24 is dished on its underside to define a square central depression housing a temperature sensor 192 surrounded by four facets 194 extending
15 downwardly and outwardly at a pitch of approximately 5°. The pitch of the facets 194 is such as to lead condensed moisture on the evaporator 24 outwardly under force of gravity to drip into a gutter 196 (Figure 18) formed by a groove provided in the upper peripheral wall of the bin 16.

Figure 18 shows that each gutter 196 comprises two inclined portions 198 each leading
20 downwardly to a shared drainage conduit 200 that communicates through a J-bend in the wall of the bin 16 to external drainage pipes (not shown).

In all of the above embodiments, viewing means may be provided to assist a user in viewing the contents of any bin 16 that is too high to be viewed easily from above through
25 its open top. At its simplest, a window may be provided in the front and/or bottom of a bin 16. Another way of viewing the contents would be to place a mirror above the open bin 16, the mirror being angled to provide a view from above the bin 16 even though the user's eye line is below the mirror and possibly also below the bin 16. Preferably, the mirror is retractable when not needed for use, for example being hinged to the front panel 52 of the
30 refrigerator engine compartment 18 - the mirror can even constitute that panel 52 - or being foldable out of the front of a bin 16. Even if the bin 16 is a little above the user's head, the benefit of a view from above means that it will usually be possible to reach into

the bin 16 to access its contents as desired.

Referring finally to Figures 20(a), 20(b) and 20(c), these show how the inventive concept can be scaled up to encompass bulk storage in a cold store and commercial transportation in a refrigerated vehicle. Figure 20(a) shows a vehicle 202 carrying a standardised refrigerated storage container 204 that is akin to the bins 16 of the preceding embodiments, being an insulated container defined by normally-closed walls having an open top closed by an openable insulated lid 206 that preferably includes a cooling means in the form of a roof-mounted refrigerator engine 208. As shown in Figure 20(b), the lid 206 can be opened so that goods 210 can be loaded and unloaded from above using an overhead gantry crane 212 without losing cold air from the container 204. A further advantage is that the entire plan area of the container 204 can be accessed readily by the crane 212 rather than relying for access upon a restricted door in the rear or side of the container 204.

Figure 20(c) shows how full containers 204 can be left without lids in the refrigerated environment of a cold store 214, which may be a building as shown or some other refrigerated storage facility such as a ship's cargo hold. The associated lids 206 and refrigerator engines 208 can be used elsewhere during that storage period. If containers 204 are stacked, a container 204 can serve as the lid 206 for the container 204 below. When required, a container 204 can be fitted with a lid 206 and refrigerator engine 208 and lifted on to a suitable vehicle 202 for transport wherever necessary.

Many other variations are possible within the inventive concept. For example, rather than employing the vertical array of drawers 4 common to the embodiments described above, a side-by-side arrangement of drawers 4 is also contemplated. Indeed, it is possible to have any number of drawers, from one upwards, and to have any desired arrangement of drawers.

The configuration of air gaps 38 around the bins 16 may be varied without departing from the inventive concept. Furthermore, the circulation of air around the interior of the cabinet 6 can be assisted in several ways.

Whilst the bins 16 described above are largely rectangular in shape as this is optimally space-efficient, any polygonal or rounded shape may be adopted, even a hemisphere. Of course, a wide variety of bin sizes and depths is possible within the inventive concept.

5

The construction of the bins 16 may also be varied: whilst solid-walled bins 16 fabricated from insulating material have been described, it may be desirable to adopt a vacuum design; i.e. to use double-walled bins, the two walls being separated by a partial vacuum or merely an insulating medium of trapped air.

10

Whilst a roll-out screen 70 is described in the foregoing specific embodiments, it is only one solution to the problem of providing a retractable screen. Other variations include folded sheets that concertina upon closing a drawer, or a telescopic stack of sheets that slide apart so that the end of one sheet pulls the front of the next sheet as they are pulled from the stack.

15

In addition, whilst using a scraper 76 is a convenient method of removing condensation from the screen 70, other methods are possible. Most simply, water can be allowed to drain from the screen 70 of its own accord, to be collected in a suitably positioned tray.

20

Instead of providing a dedicated control and display panel 30 for each bin 16, all of the bins 16 could be controlled by a single central control and display panel 30. Further, whilst it is preferred that all of the bins 16 are individually controllable whether by a single shared panel 30 or by a plurality of dedicated panels 30, it is possible within the inventive concept to predetermine the bin temperatures of a multi-bin appliance. The predetermined temperatures may vary from bin to bin to provide zones for storage of different items, or two or more bins may share the same temperature or function. For example, it would be possible to designate a multi-bin appliance as all refrigerator or all freezer if one wished to do so, although the possibility remains of varying temperature within the typical refrigerator or freezer temperature range if desired.

25

30

The invention lends itself to manual or automatic operation of opening and closing

- 33 -

movements. Automatic operation may, for example, assist opening of the gravity-closing variant of Figure 10.

5 It is also possible for a partial vacuum to be applied to a closed bin so as to remove oxygen and other gases and enzymes, thereby to slow product degradation.

10 In general, therefore, reference should be made to the appended claims and other general statements herein rather than to the foregoing specific description as indicating the scope of the invention. In interpreting the invention, it should be understood that although features of the illustrated embodiments have been described in combination with each other and although such combinations may have advantages of their own, many of those features can be applied independently. So, those features are considered to be independently patentable whether within or beyond the inventive concepts expressed herein.

CLAIMS

1. A cold-storage appliance including:
- 5 an open-topped insulating container defining an external surface;
- an insulating lid adapted to close the open top of the container;
- a cooling means adapted to cool the interior but not the exterior of the container;
- 10 and
- a structure supporting the container, the lid and the cooling means;
- wherein the container is mounted to the structure for movement relative to the structure
- 15 and the lid to open the container and afford access to its interior or to close the container,
- and wherein at least a majority of the external surface of the container is exposed to ambient air when the container is closed by the lid.
2. The appliance of Claim 1, wherein movement of the container with respect to the
- 20 structure and the lid includes a major generally horizontal component of movement.
3. The appliance of Claim 2, wherein the container is mounted to the structure by means running along at least one generally horizontal track.
- 25 4. The appliance of Claim 3, wherein the track includes at least one rail.
5. The appliance of Claim 4, wherein the or each rail is telescopic.
6. The appliance of any of Claims 2 to 5, wherein the container is supported by wheels or
- 30 rollers running along a generally horizontal support surface.
7. The appliance of any of Claims 2 to 6, wherein generally horizontal movement of the

– 35 –

container is effected by opening a door of the appliance.

8. The appliance of any preceding Claim, wherein movement of the container with respect to the structure and the lid includes a minor generally vertical component of movement and wherein the container is mounted to the structure by means permitting said generally vertical movement.

9. The appliance of Claim 8, wherein the container lifts against the lid upon closing and drops away from the lid upon opening.

10. The appliance of Claim 8 or Claim 9, wherein the track or support surface includes a ramp effecting said vertical component of movement.

11. The appliance of any of Claims 8 to 10 and including crank means responsive to closing movement of the container to lift the container toward the lid.

12. The appliance of any preceding Claim, wherein closing movement of the container with respect to the structure and the lid wedges together the container and the lid.

13. The appliance of Claim 12, wherein a track or support surface supporting the container converges with the lid in the closing direction of the container.

14. The appliance of Claim 12 or Claim 13, wherein the lid is received and embraced by a rim portion of the container that squeezes the lid laterally when the container and the lid wedge together.

15. The appliance of Claim 14, wherein the lid and the rim portion are complementarily tapered.

16. The appliance of any of Claims 12 to 14, comprising holding means for holding the container wedged against the lid.

– 36 –

17. The appliance of Claim 3 or Claim 6, wherein the track or support surface is exposed to ambient air.

5 18. The appliance of any preceding Claim, further including a seal that seals the container to the lid when the container is closed.

19. The appliance of Claim 12, wherein the seal is compressible.

10 20. The appliance of Claim 18 or Claim 19, wherein the seal is of magnetic, hydraulic, or pneumatic type.

21. The appliance of Claim 20, wherein the seal is electro-magnetic.

15 22. The appliance of any preceding Claim, wherein opening movement of the container is against the force of gravity.

23. The appliance of any preceding Claim, wherein substantially all of the external surface of the container is exposed to ambient air when the container is closed.

20 24. The appliance of any preceding Claim, wherein the external surface of the container comprises a plurality of surface portions.

25 25. The appliance of Claim 24, wherein the surface portions are defined by bottom and side walls of the container.

26. The appliance of any preceding Claim, wherein the container is generally cuboidal.

30 27. The appliance of any preceding Claim and including a scraper or wiper means associated with the container to remove ice or water from the cooling means upon relative movement between the container and the lid.

28. The appliance of Claim 27 and including first and second scraper or wiper blades

– 37 –

arranged respectively to remove ice or water from the cooling means during opening and closing of the container.

- 5 29. The appliance of any preceding Claim and including a flexible membrane associated with the cooling means and means for locally deforming the membrane to remove ice or water from the membrane upon relative movement between the container and the lid.
- 10 30. The appliance of any preceding Claim, wherein the cooling means is associated with the lid.
31. The appliance of Claim 30, wherein the cooling means is integral with the lid.
- 15 32. The appliance of Claim 30 or Claim 31, wherein the cooling means is substantially flush with the underside of the lid.
33. The appliance of any preceding Claim, further including shut-down means for shutting down the cooling means when the container is not closed.
- 20 34. The appliance of Claim 33, wherein the shut-down means includes a switch closed by presence of the container.
35. The appliance of any preceding Claim, wherein a retractable screen is extensible to screen the cooling means when the container is open.
- 25 36. The appliance of Claim 35, wherein the screen is attached at one end to the structure and at an opposed end to the container or to means associated with the container.
37. The appliance of Claim 35 or Claim 36, wherein the screen is removably attached to the means associated with the container.
- 30 38. The appliance of Claim 37, further including retaining means for retaining the screen in a wholly or partially extended configuration when the screen is detached from the

- 38 -

container.

39. The appliance of any of Claims 35 to 38, wherein the screen is exposed to ambient air when retracted.

5

40. The appliance of any of Claims 35 to 38, wherein the screen is furled on a roller when retracted.

41. The appliance of any of Claims 35 to 40, wherein the screen is heat-reflective.

10

42. The appliance of any of Claims 35 to 41, wherein a wiper or scraper is operable during retraction of the screen to remove water or ice from the screen.

43. The appliance of any of Claims 35 to 42, wherein the screen is biased into a retracted configuration.

15

44. The appliance of any preceding Claim, wherein the cooling means is adjustable so that the same container can be used to chill or to freeze.

20 45. The appliance of any preceding Claim, wherein the structure is a cabinet.

46. The appliance of any preceding Claim, wherein the structure is a frame.

47. The appliance of Claim 46, wherein the frame is adapted to be built-in between cupboards or other structures.

25

48. The appliance of any preceding Claim, wherein the structure defines at least one ambient air circulation channel around the external surface of the closed container.

30 49. The appliance of any preceding Claim, further including means for drawing in ambient air from the front of the appliance.

– 39 –

50. The appliance of Claim 49, wherein the structure defines a front panel including at least one opening for admission of ambient air.

5 51. The appliance of Claim 50, wherein the front panel further comprises control and/or display means.

52. The appliance of any preceding Claim, further including means for exhausting ambient air to the front of the appliance.

10 53. The appliance of any preceding Claim, further comprising an impeller for promoting admission and exhaustion of ambient air.

54. The appliance of any preceding Claim, wherein the container is removable from the structure.

15 55. The appliance of Claim 54, wherein an auxiliary lid is attachable to the container when removed from the structure.

20 56. The appliance of Claim 54 or Claim 55 when dependant from Claim 36 or from any Claim dependent from Claim 36, wherein the means associated with the container is a movable cradle adapted to receive the container.

57. The appliance of any preceding Claim, wherein the container can be moved with respect to the structure in a plurality of different directions to open the container.

25 58. The appliance of any preceding Claim, further comprising means for dividing the interior of the container.

30 59. The appliance of any preceding Claim and having a plurality of containers, each having an associated lid and cooling means.

60. The appliance of Claim 59, wherein the respective cooling means are independently

– 40 –

controllable.

61. The appliance of Claim 59 or Claim 60, wherein the cooling means are connected to a common refrigerator engine.

5

62. The appliance of any of Claims 59 to 61, wherein the containers are stacked one above another.

63. The appliance of any of Claims 59 to 62, further including means for preventing opening of a container when another container of the plurality is open.

10

64. The appliance of any of Claims 59 to 63, wherein the containers are of different interior sizes, shapes or volumes.

65. The appliance of any preceding Claim, further including viewing means to assist a user in viewing the contents of a container.

15

66. The appliance of Claim 65, wherein a viewing window is provided in the front and/or bottom of a container.

20

67. The appliance of Claim 65 or Claim 66 and including a viewing mirror positioned above the container to afford a reflected view from above the container into its open top.

68. The appliance of Claim 67, wherein the mirror is retractable when not in use.

25

69. The appliance of Claim 68, wherein the mirror is attached to the container.

70. The appliance of any of Claims 67 to 69 and having a plurality of containers, wherein the mirror is positioned above the containers to view the contents of any of the containers.

30

71. The appliance of any preceding Claim, further including a defrost tray positionable in the container below the cooling means.

72. The appliance of Claim 71, wherein the defrost tray includes a scraper or wiper means to remove ice or water from the cooling means upon relative movement between the container and the lid.

5

73. The appliance of Claim 71 or Claim 72, wherein the defrost tray includes an absorbent insert.

74. The appliance of Claim 73, wherein the insert is heatable.

10

75. The appliance of any preceding Claim, wherein the cooling means includes an evaporator exposed to the interior of the container when the container is closed.

76. The appliance of any preceding Claim, wherein the cooling means includes cold air ducts to feed cold air into the container when the container is closed.

15

77. The appliance of Claim 76, wherein the cold air is supplied by a fan coil circuit.

78. The appliance of any preceding Claim, wherein the cooling means is generally inclined or has locally inclined portions to promote drainage of moisture condensed thereon away from the interior of the container.

20

79. The appliance of Claim 78, wherein the cooling means communicates with ducts in the lid or the container for drainage of moisture away from the cooling means.


25

80. The appliance of any preceding Claim, and being embodied in a refrigerated vehicle application.

81. The appliance of Claim 80, and being embodied in a vehicle-mountable container.

30

82. A cold-storage appliance, substantially as hereinbefore described with reference to or as illustrated in any of the accompanying drawings.

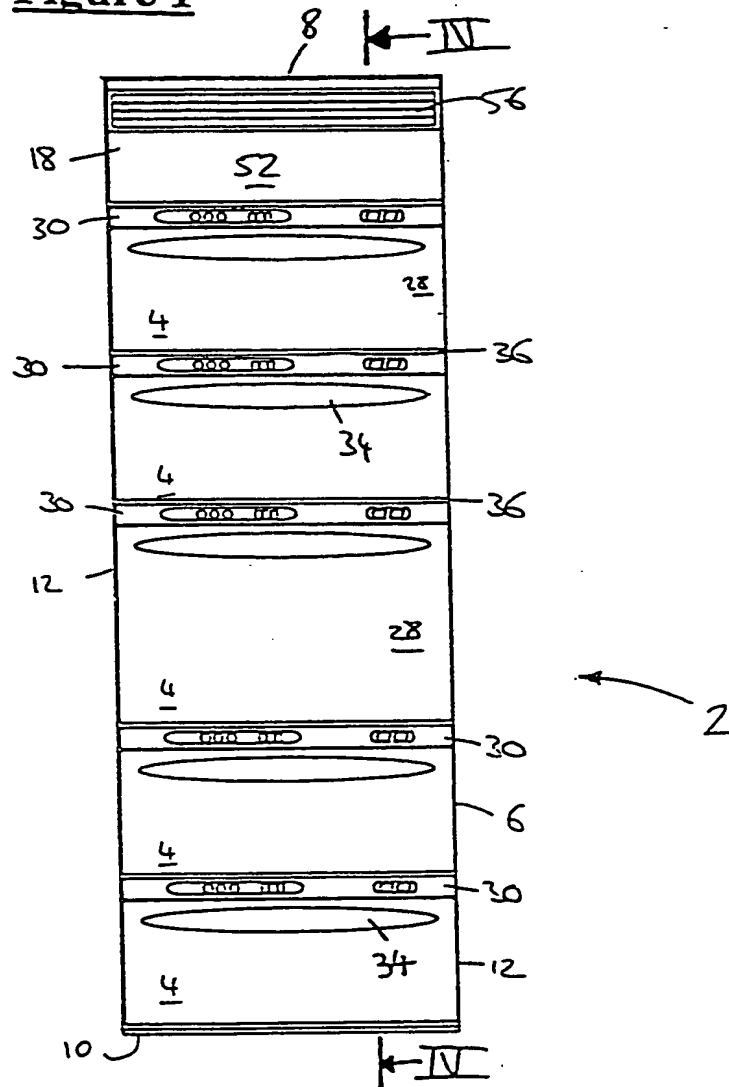Figure 1

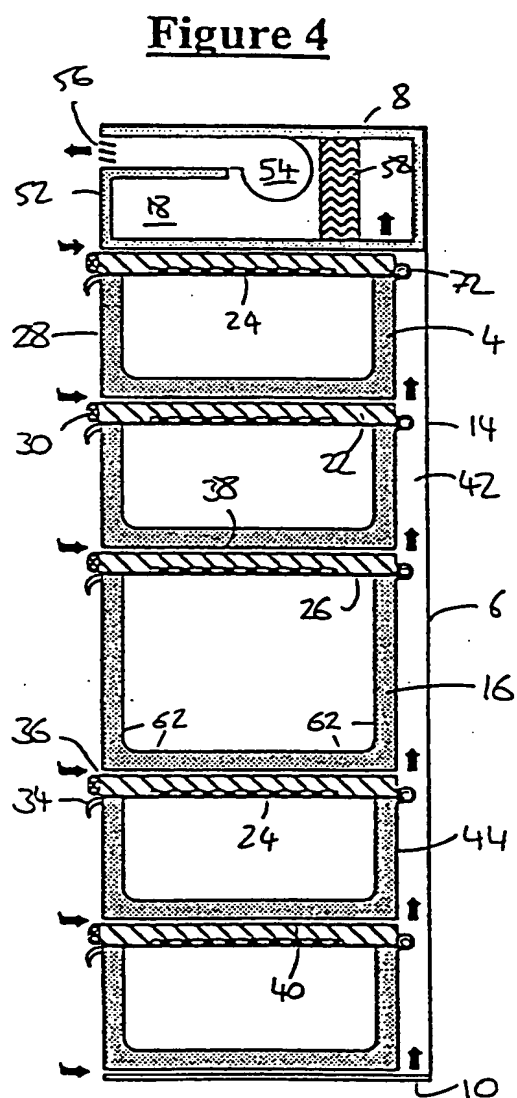
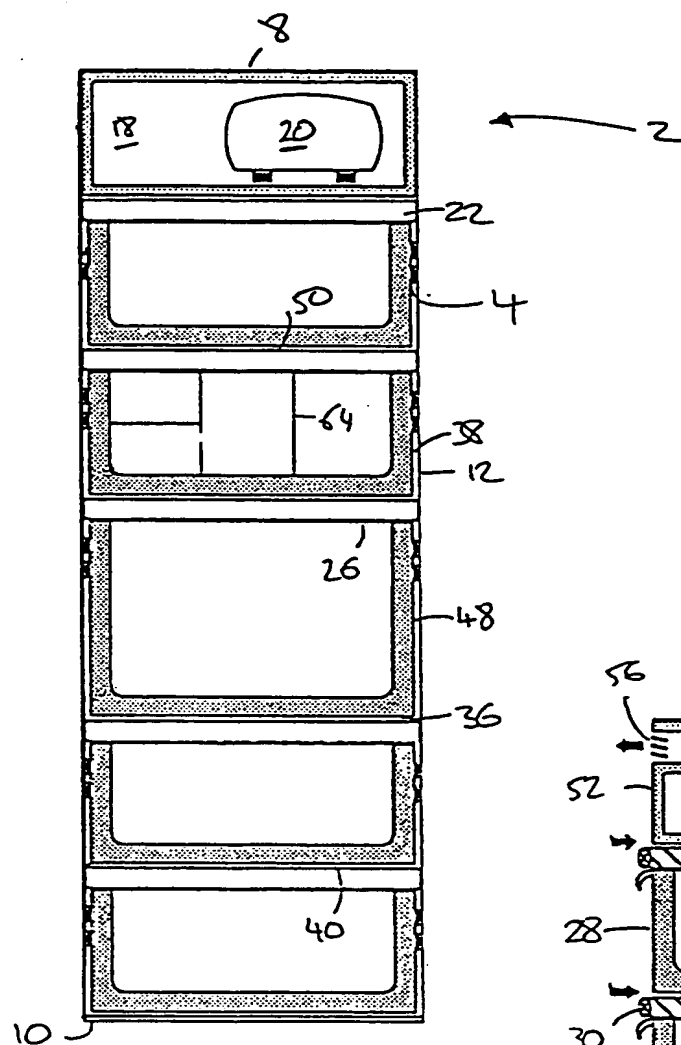
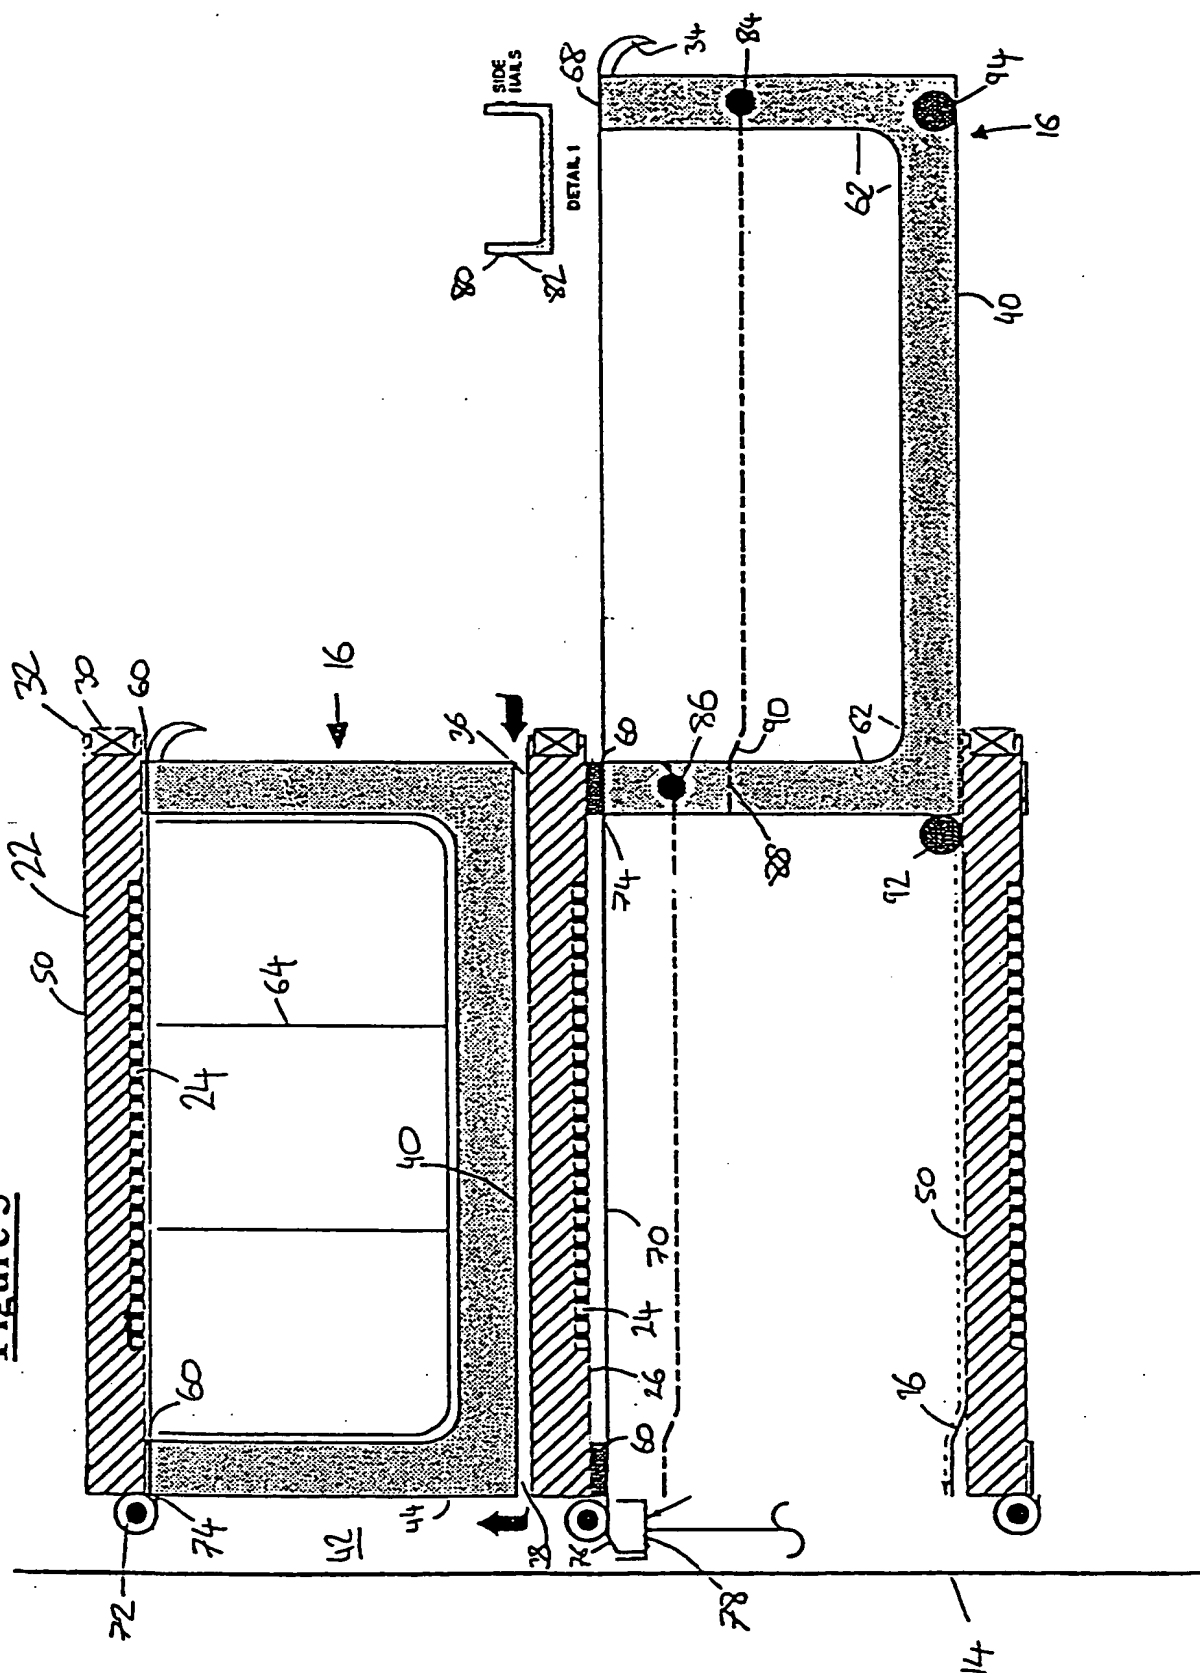


Figure 5



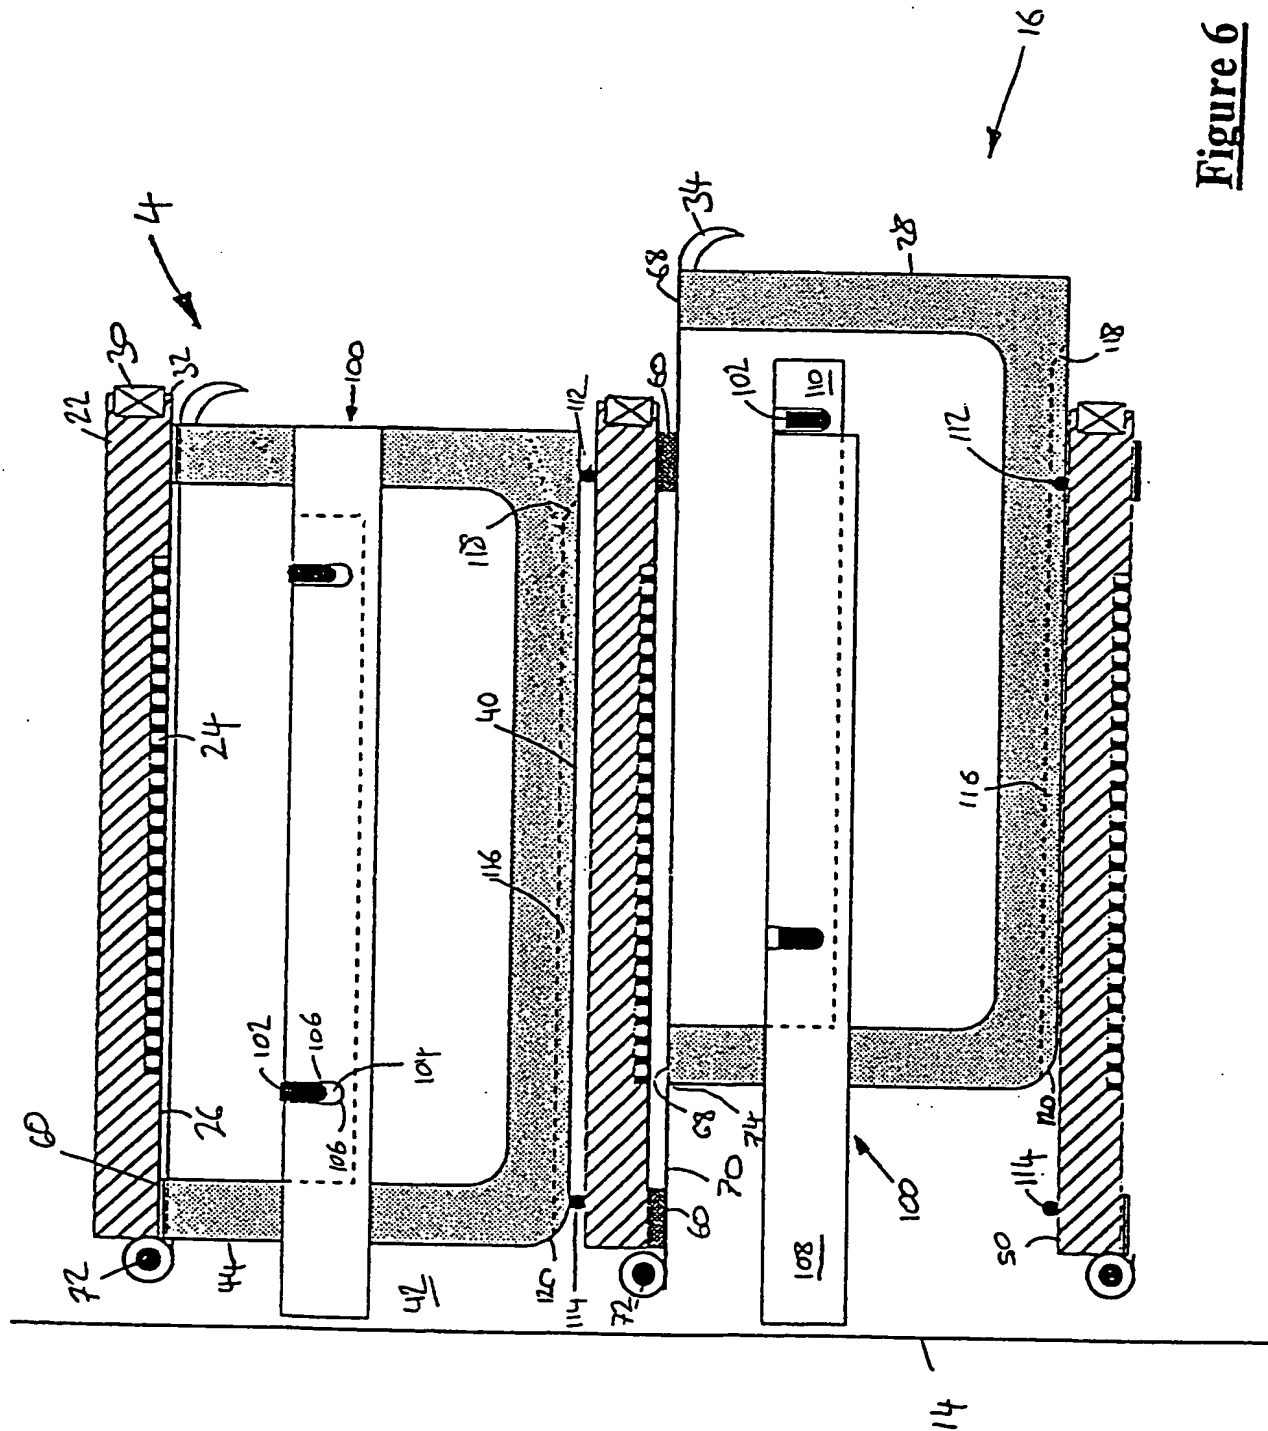


Figure 6

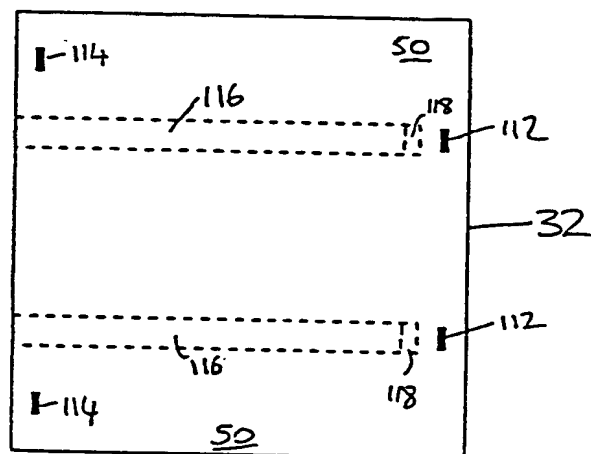
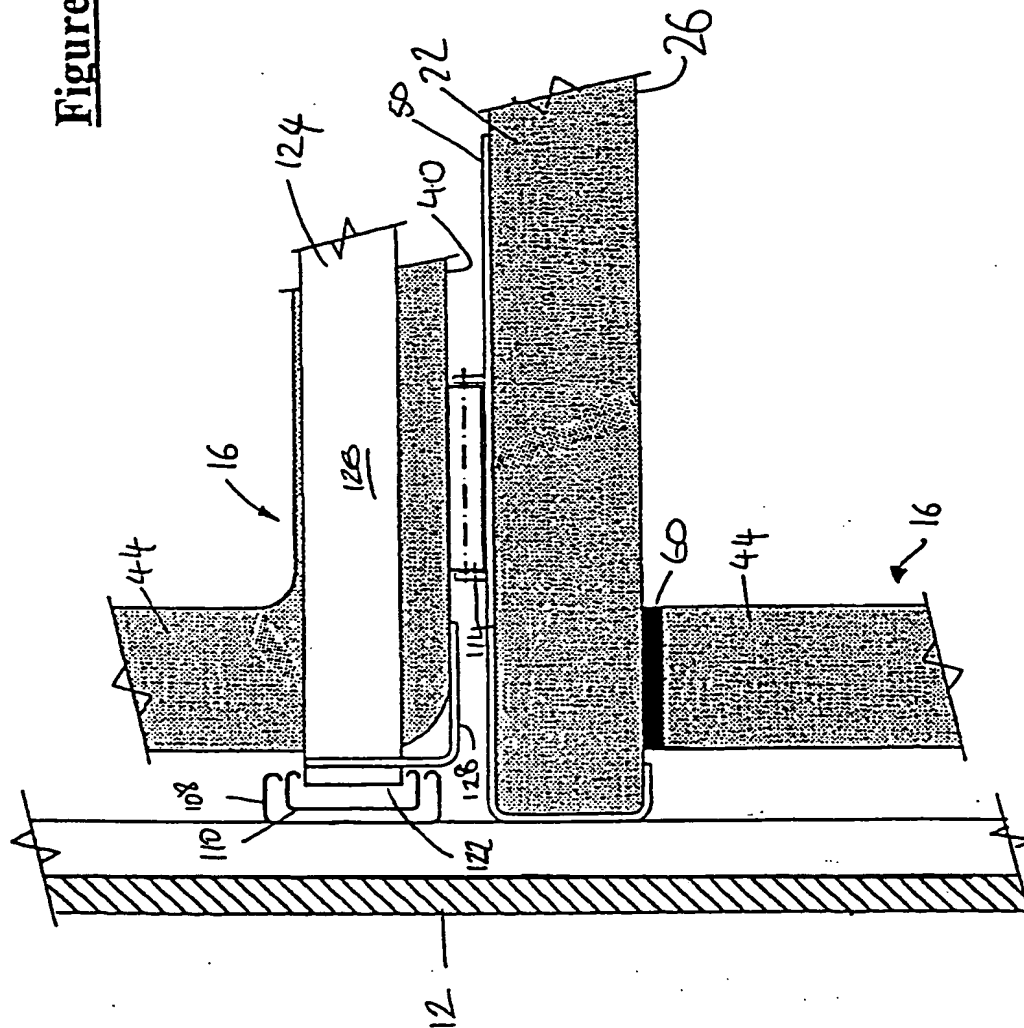
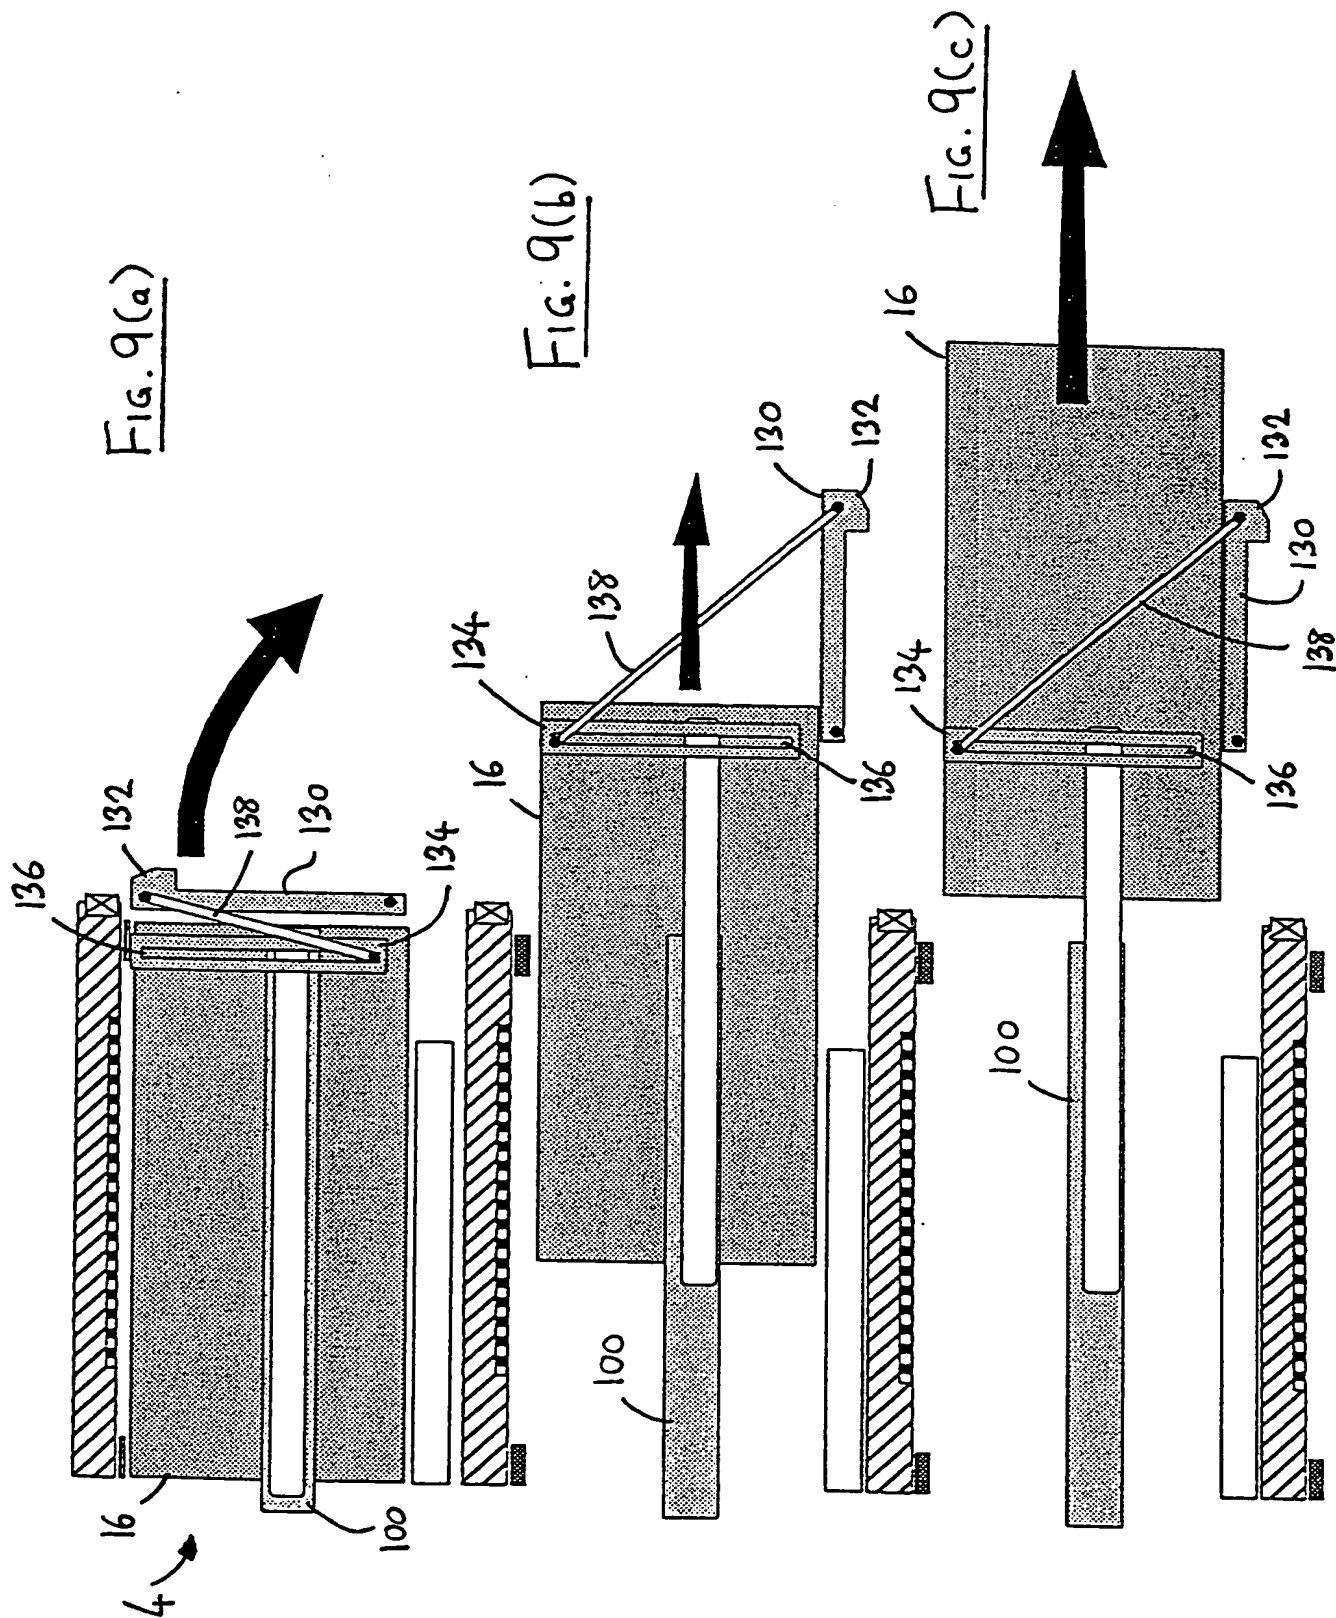
Figure 7

Figure 8





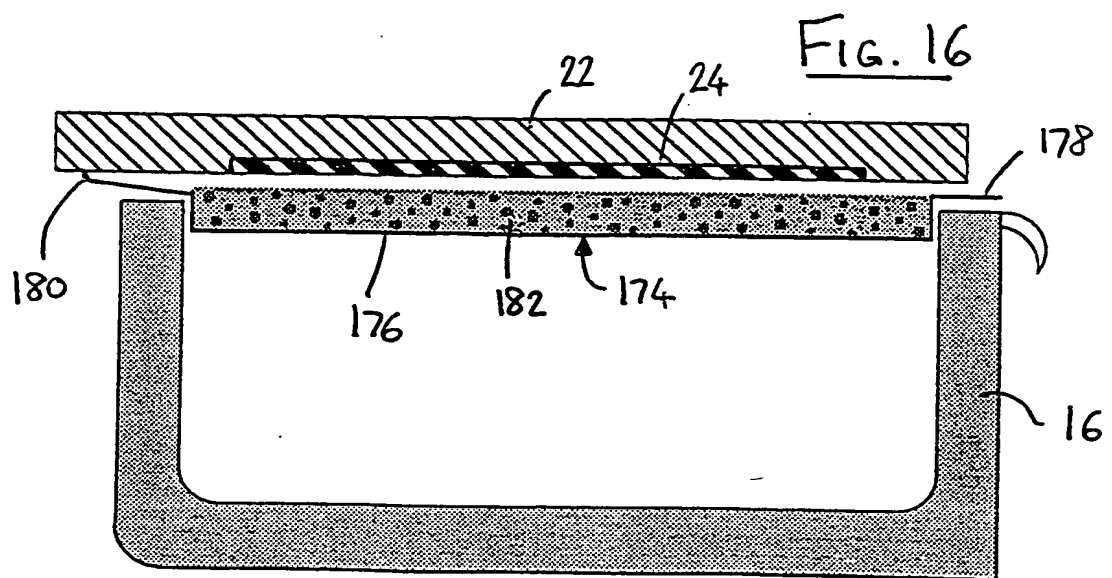
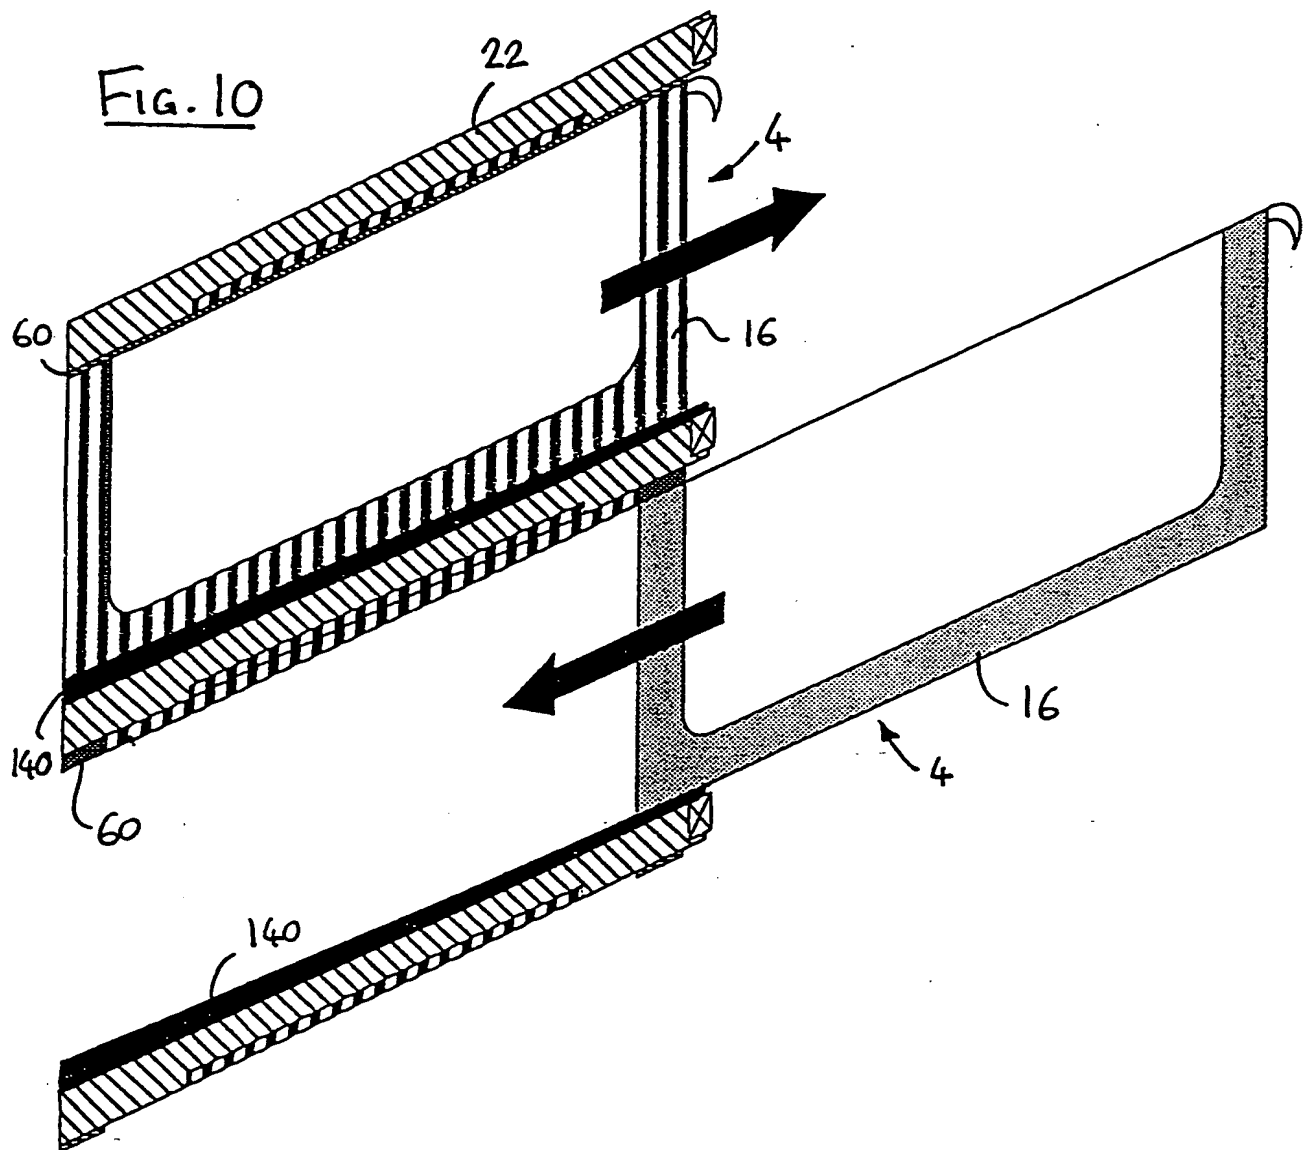


FIG. 11(a)

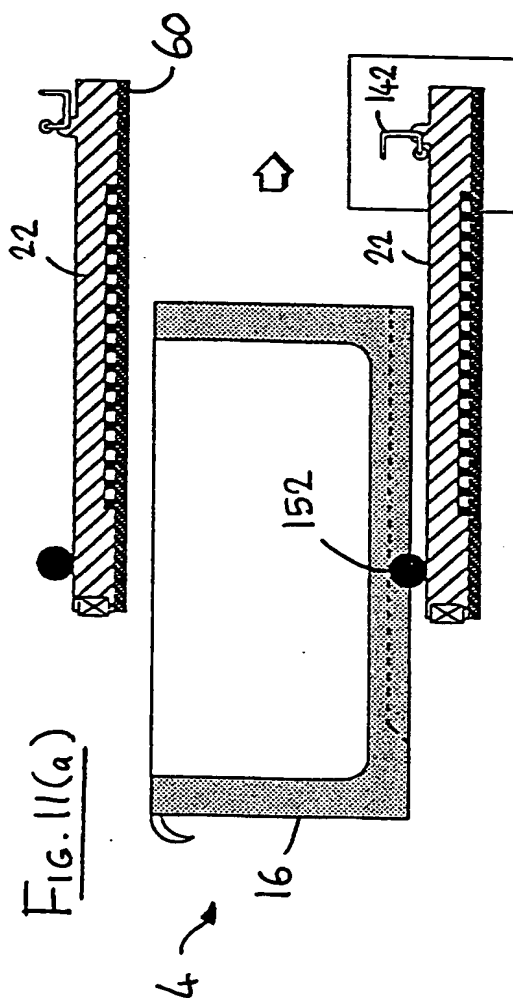


FIG. 11(b)

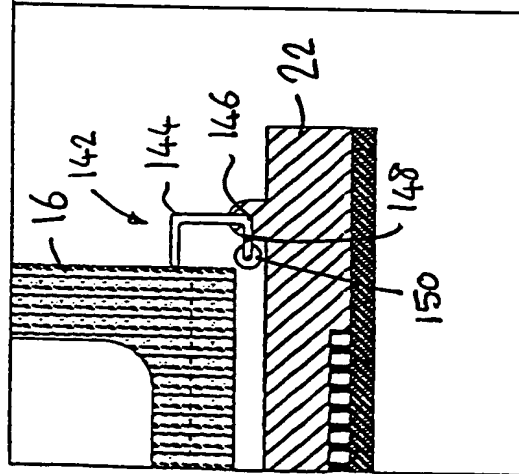


FIG. 11(d)

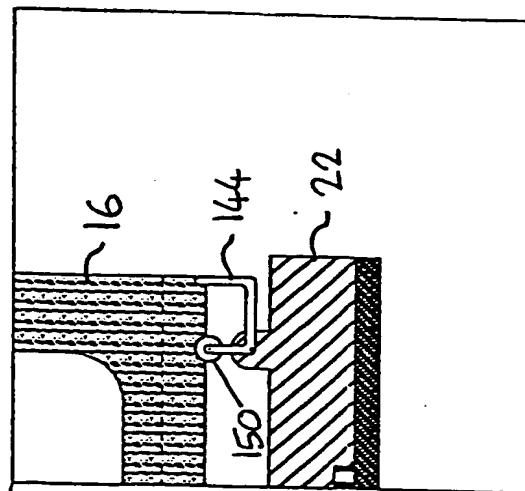
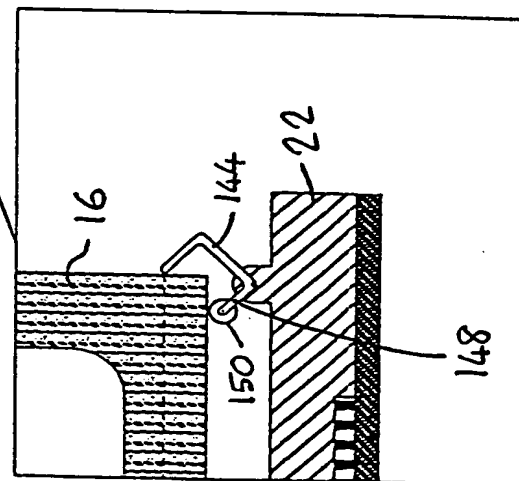


FIG. 11(c)



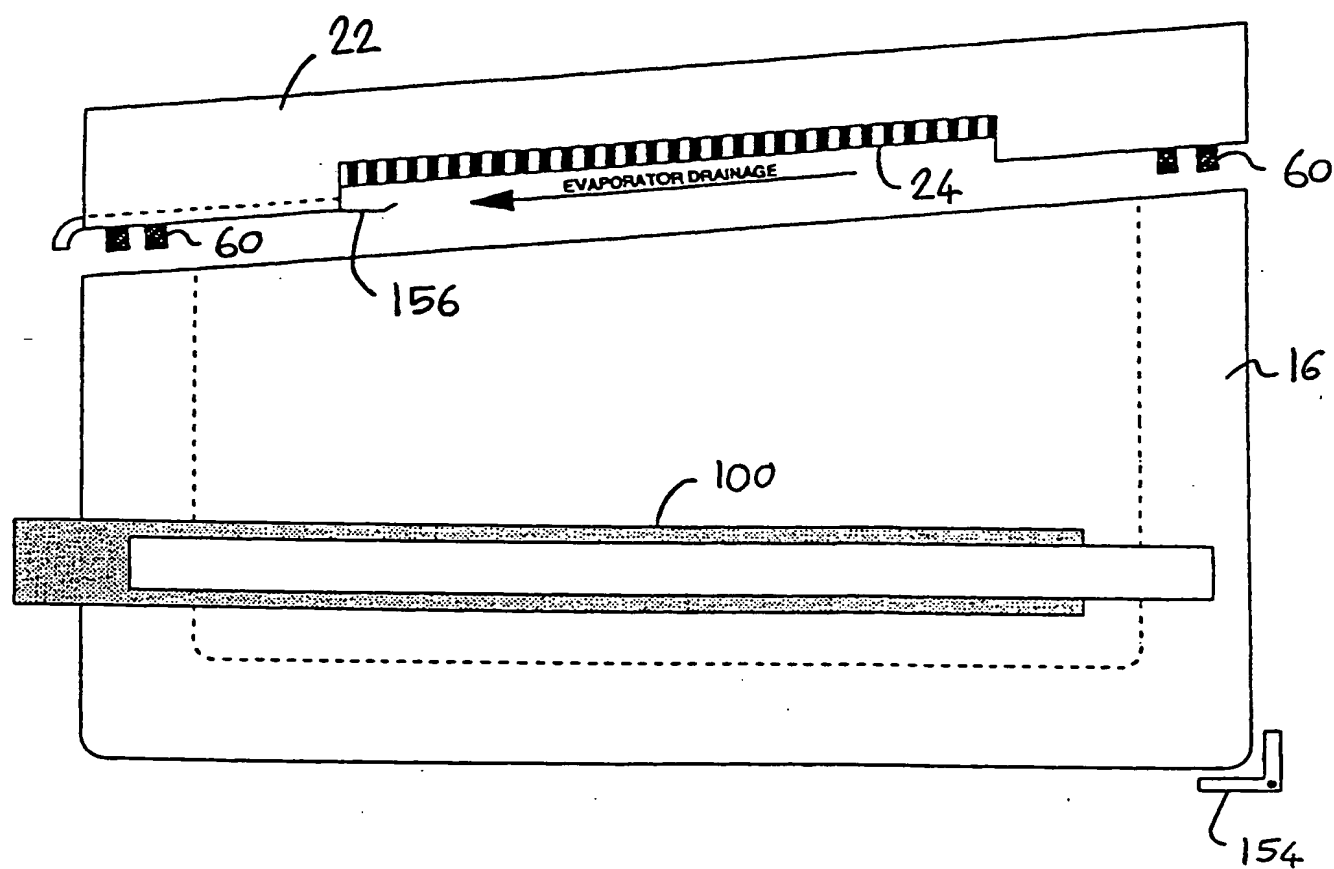
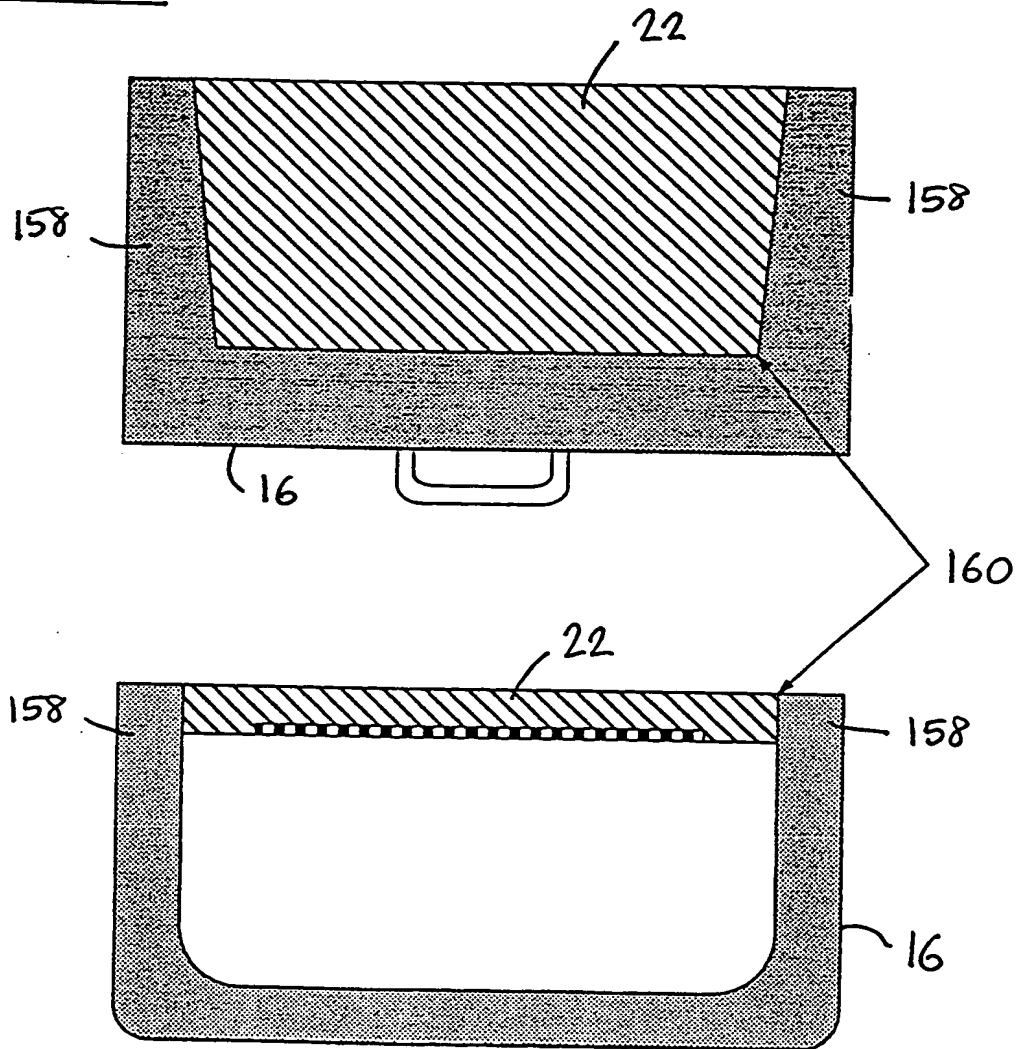


Fig. 12

FIG. 13(a)FIG. 13(b)

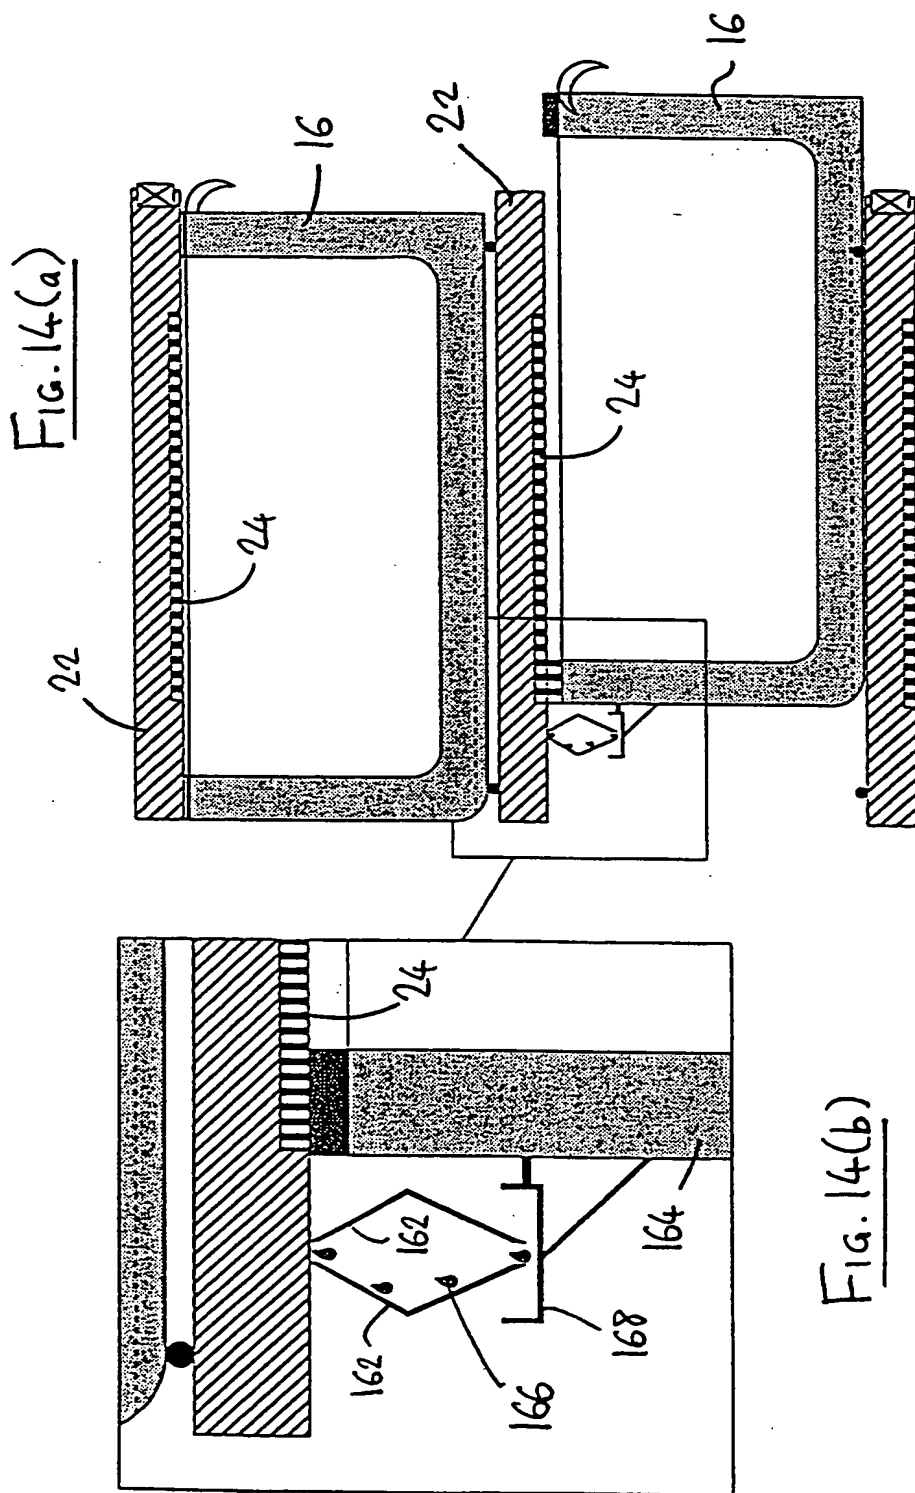
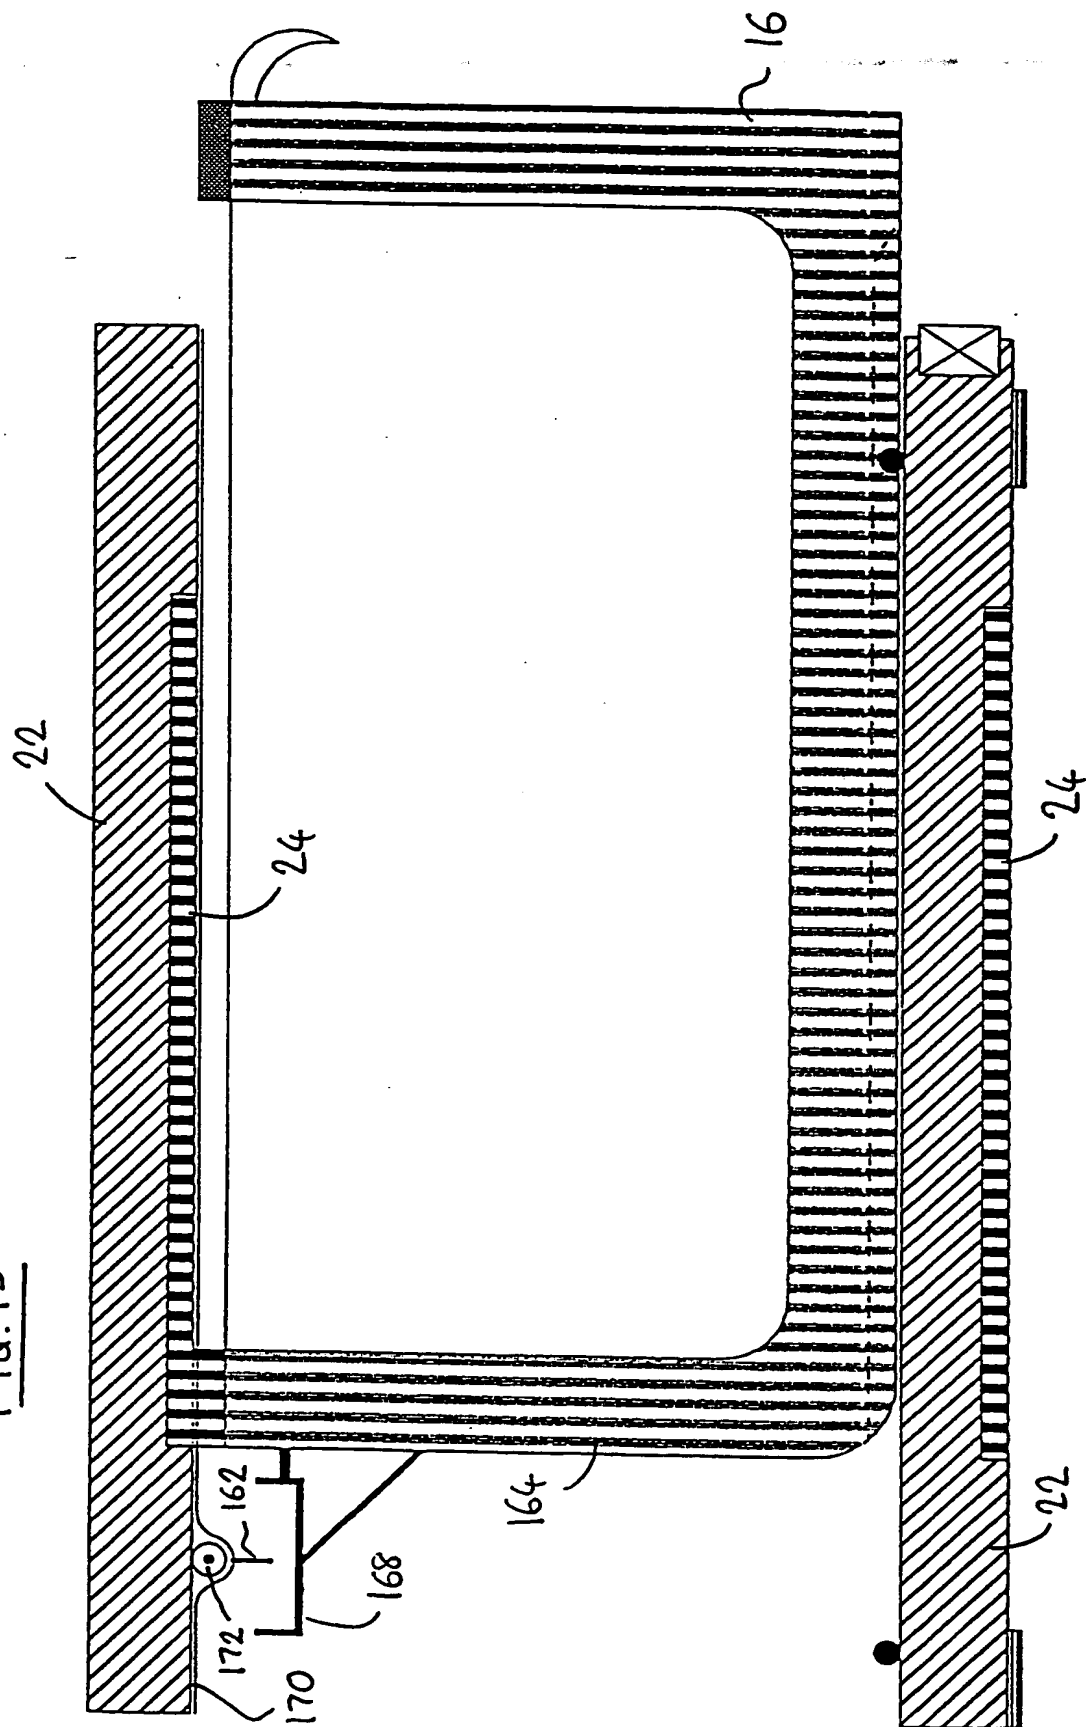
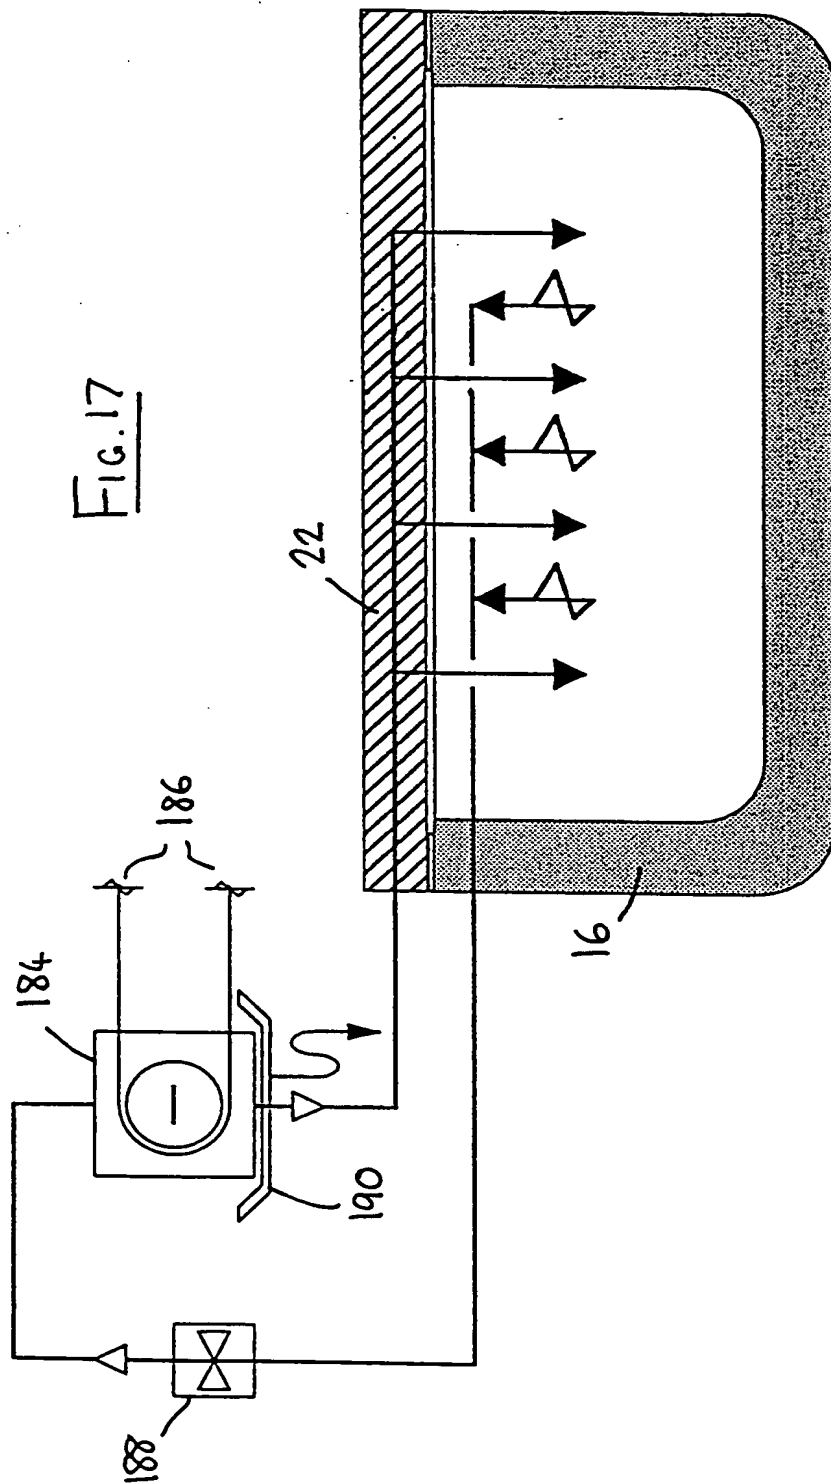


FIG. 15





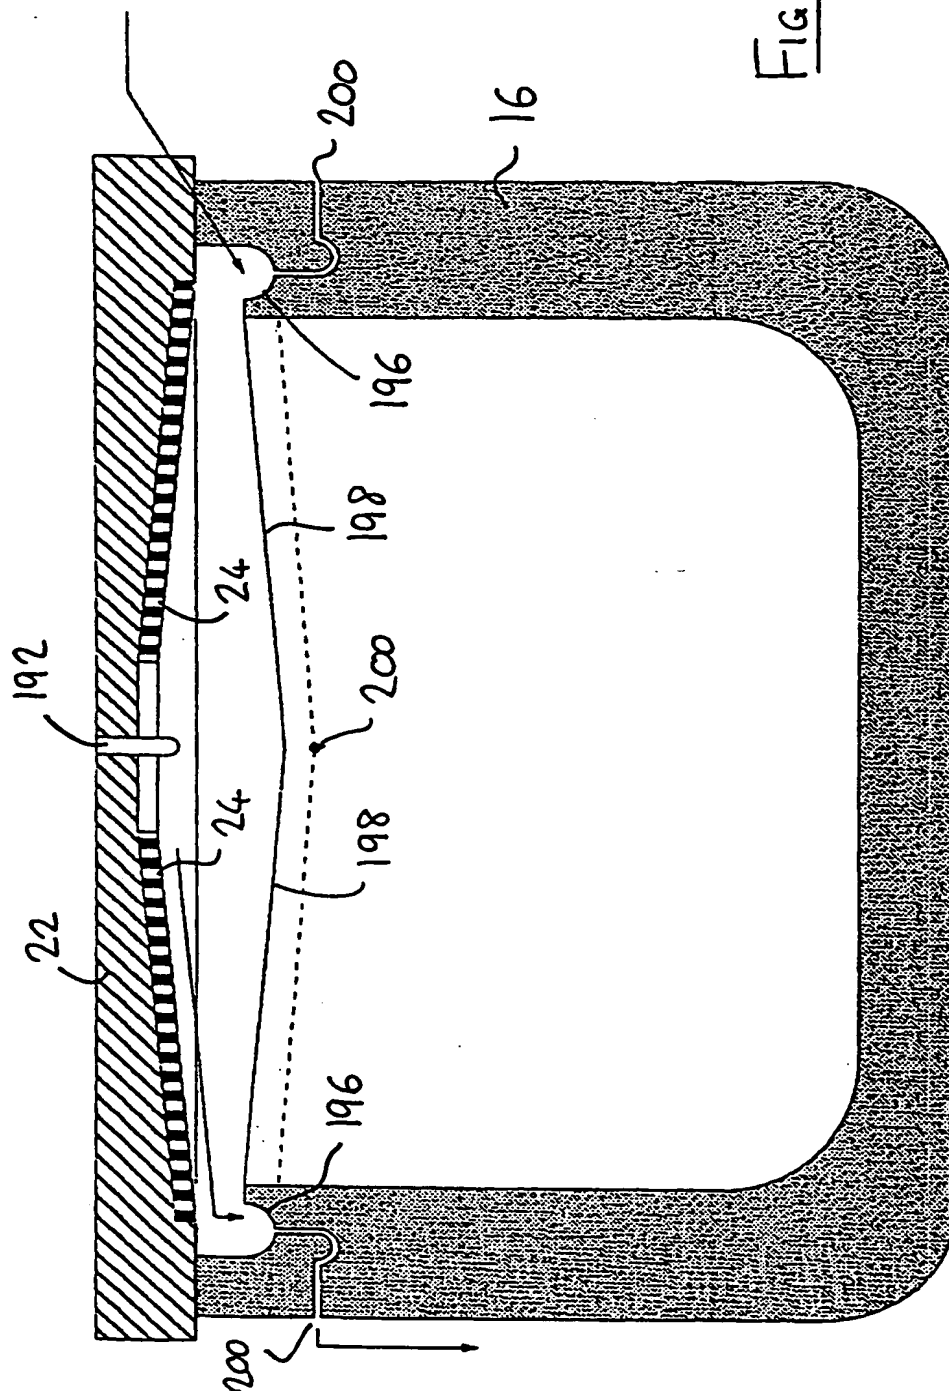


FIG. 19(a)




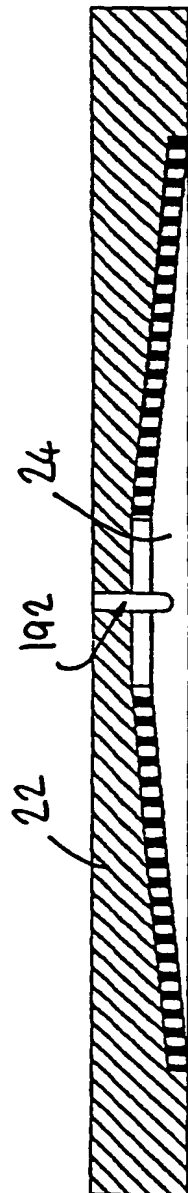


FIG. 19(b)

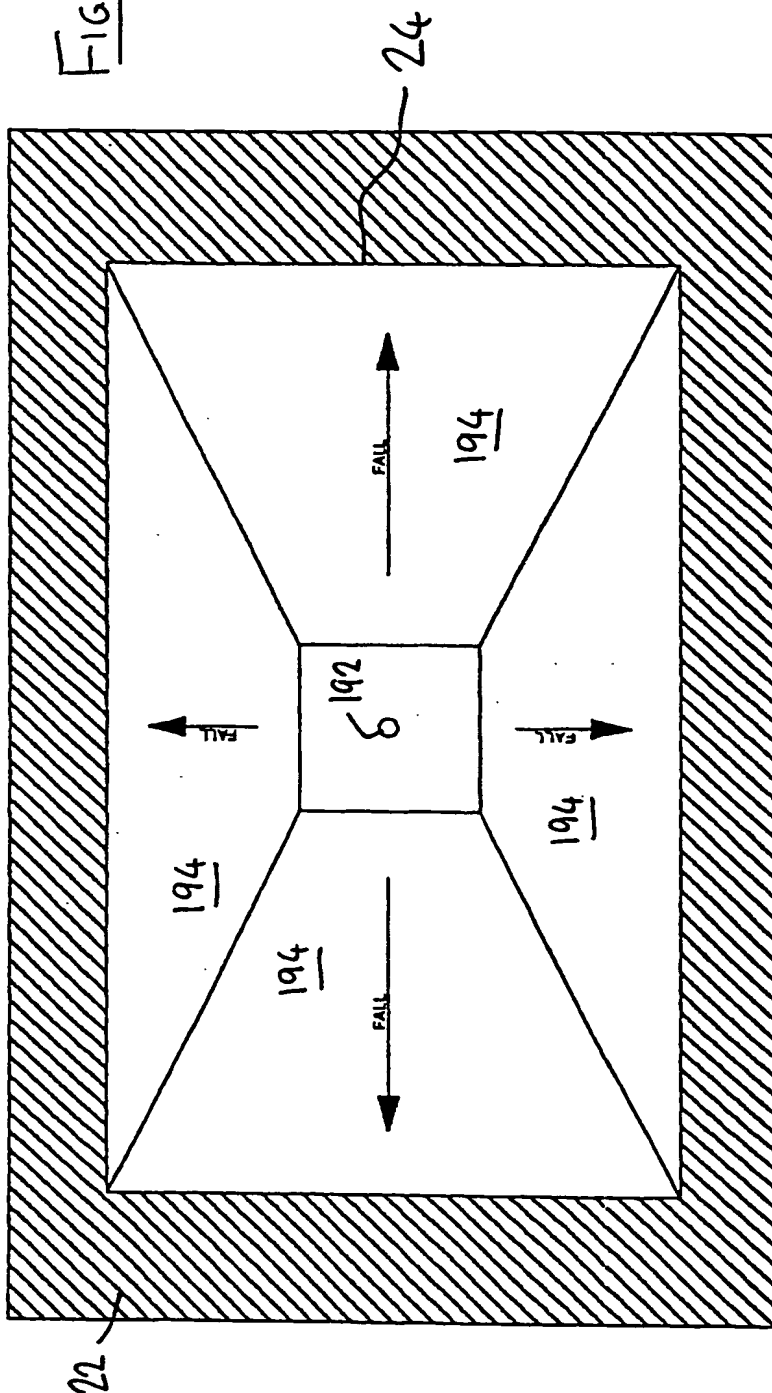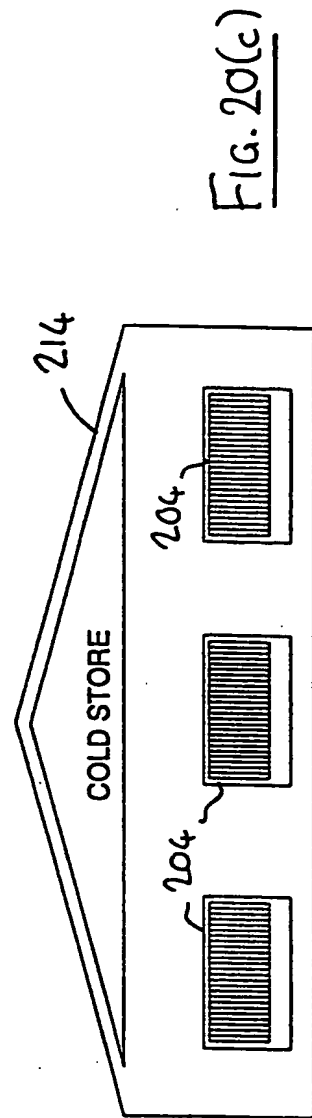

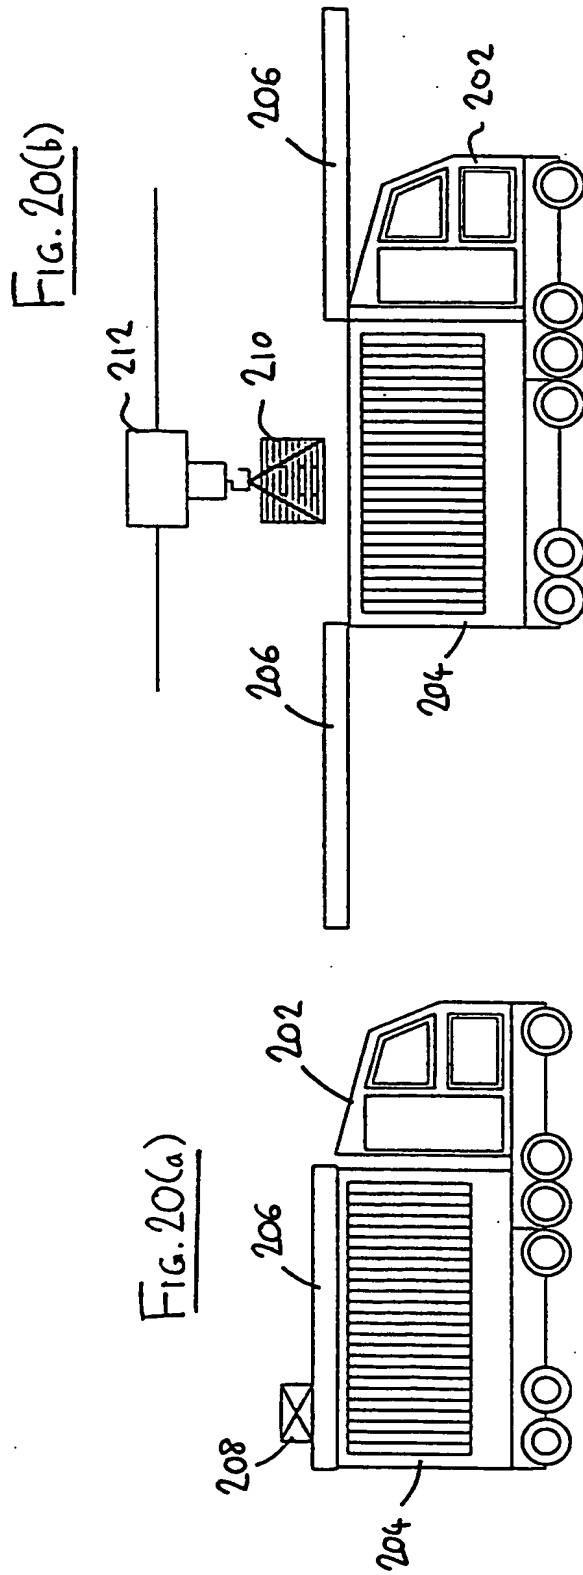

INTERNATIONAL SEARCH REPORT

Inter. Application No

PCT/GB 00/03521

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F25D15/00 F25D25/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F25D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 16 01 936 A (WALTERSDORF, HEINZ) 4 March 1971 (1971-03-04) the whole document ---	1,82
A	US 1 337 696 A (EWEN MALCOLM F) 20 April 1920 (1920-04-20) the whole document ---	1,82
A	US 4 898 294 A (JENNINGS GARY K) 6 February 1990 (1990-02-06) the whole document ---	1,82
A	US 3 477 243 A (SCHROEDER ADOLPH C ET AL) 11 November 1969 (1969-11-11) the whole document --- -/--	1,82



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

g document member of the same patent family

Date of the actual completion of the international search

6 December 2000

Date of mailing of the international search report

13/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Busuiocescu, B

INTERNATIO SEARCH REPORT

Inter. Application No
PCT/GB 00/03521

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>GB 1 400 685 A (GRUENZWEIG HARTMANN GLASFASER;GLASFASER AG) 9 July 1975 (1975-07-09) the whole document -----</p>	1,82

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter.

Application No

PCT/GB 00/03521

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 1601936	A	04-03-1971	NONE	
US 1337696	A	20-04-1920	NONE	
US 4898294	A	06-02-1990	NONE	
US 3477243	A	11-11-1969	NONE	
GB 1400685	A	09-07-1975	DE 2212638 A	27-09-1973
			ES 412755 A	16-01-1976
			FR 2176140 A	26-10-1973
			NL 7303422 A, B,	18-09-1973

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference SPC/P5099W0	FOR FURTHER ACTION <small>see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.</small>	
International application No. PCT/GB 00/ 03521	International filing date (day/month/year) 13/09/2000	(Earliest) Priority Date (day/month/year) 13/09/1999
Applicant WOOD, Ian David		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 4 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the language, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ Certain claims were found unsearchable (See Box I).

3. ☐ Unity of invention is lacking (see Box II).

4. With regard to the title,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☐ the text is approved as submitted by the applicant.

☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the drawings to be published with the abstract is Figur No. 1

☐ as suggested by the applicant.

☒ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

☐ None of the figures.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 00/03521

Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

A cold-storage appliance (2) comprises an open-topped insulating container (16) defining an external surface an insulating lid (22) adapted to close the open top of the container, a cooling means (24) adapted to cool the interior but not the exterior of the container (16), and a structure supporting the container (16), the lid (22) and the cooling means (24). In accordance with the invention, the container (16) is mounted to the structure for movement relative to the structure and the lid (22) to open the container (16) and afford access to its interior or to close the container (16), and at least a majority of the external surface of the container (16) is exposed to ambient air when the container (16) is closed by the lid (22).

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/03521

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F25D15/00 F25D25/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 F25D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 16 01 936 A (WALTERSDORF, HEINZ) 4 March 1971 (1971-03-04) the whole document ----	1,82
A	US 1 337 696 A (EWEN MALCOLM F) 20 April 1920 (1920-04-20) the whole document ----	1,82
A	US 4 898 294 A (JENNINGS GARY K) 6 February 1990 (1990-02-06) the whole document ----	1,82
A	US 3 477 243 A (SCHROEDER ADOLPH C ET AL) 11 November 1969 (1969-11-11) the whole document ---- -/--	1,82

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *&* document member of the same patent family

Date of the actual completion of the international search

6 December 2000

Date of mailing of the international search report

13/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Busuiocescu, B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/03521

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 1 400 685 A (GRUENZWEIG HARTMANN GLASFASER; GLASFASER AG) 9 July 1975 (1975-07-09) the whole document -----	1,82

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/03521

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 1601936 A	04-03-1971	NONE	
US 1337696 A	20-04-1920	NONE	
US 4898294 A	06-02-1990	NONE	
US 3477243 A	11-11-1969	NONE	
GB 1400685 A	09-07-1975	DE 2212638 A	27-09-1973
		ES 412755 A	16-01-1976
		FR 2176140 A	26-10-1973
		NL 7303422 A,B,	18-09-1973

From the
INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY

To:

CUNNINGS, Sean Patrick
DAVID KELTIE ASSOCIATES
12 New Fetter Lane
LONDON EC4A 1AG
GRANDE BRETAGNE

PCT

NOTIFICATION OF TRANSMITTAL OF
THE INTERNATIONAL PRELIMINARY
EXAMINATION REPORT

(PCT Rule 71.1)

Date of mailing
(day/month/year) 21.12.2001

Applicant's or agent's file reference
SPC/P5099WO

IMPORTANT NOTIFICATION

International application No.
PCT/GB00/03521

International filing date (day/month/year)
13/09/2000

Priority date (day/month/year)
13/09/1999

Applicant
WOOD, Ian David

1. The applicant is hereby notified that this International Preliminary Examining Authority transmits herewith the international preliminary examination report and its annexes, if any, established on the international application.
2. A copy of the report and its annexes, if any, is being transmitted to the International Bureau for communication to all the elected Offices.
3. Where required by any of the elected Offices, the International Bureau will prepare an English translation of the report (but not of any annexes) and will transmit such translation to those Offices.

4. REMINDER

The applicant must enter the national phase before each elected Office by performing certain acts (filing translations and paying national fees) within 30 months from the priority date (or later in some Offices) (Article 39(1)) (see also the reminder sent by the International Bureau with Form PCT/IB/301).

Where a translation of the international application must be furnished to an elected Office, that translation must contain a translation of any annexes to the international preliminary examination report. It is the applicant's responsibility to prepare and furnish such translation directly to each elected Office concerned.

For further details on the applicable time limits and requirements of the elected Offices, see Volume II of the PCT Applicant's Guide.

Name and mailing address of the IPEA/



European Patent Office
D-80298 Munich
Tel. +49 89 2399 - 0 Tx: 523656 epmu d
Fax: +49 89 2399 - 4465

Authorized officer

Haase, G

Tel. +49 89 2399-7532



PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference SPC/P5099WO	FOR FURTHER ACTION		See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. PCT/GB00/03521	International filing date (<i>day/month/year</i>) 13/09/2000	Priority date (<i>day/month/year</i>) 13/09/1999	
International Patent Classification (IPC) or national classification and IPC F25D15/00			
Applicant WOOD, Ian David			

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.


2. This REPORT consists of a total of 5 sheets, including this cover sheet.

- ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☒ Certain observations on the international application

Date of submission of the demand 28/03/2001	Date of completion of this report 21.12.2001
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Duerhammer, M Telephone No. +49 89 2399 2743



**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB00/03521

I. Basis of the report

1. With regard to the elements of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):
Description, pages:

1-33 as originally filed

Claims, No.:

1-82 as originally filed

Drawings, sheets:

1/18-18/18 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/GB00/03521

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-81
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-81
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-81
	No:	Claims	

2. Citations and explanations
see separate sheet

VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:
see separate sheet

Section V,2:

Document US-A-4898 294 discloses a cold-storage appliance including: an open-topped insulating container 30 defining an external surface; an insulating lid 44 adapted to close the open top of the container; a cooling means 53 (aperture for receiving ice) adapted to cool the interior but not the exterior of the container; and a structure supporting the container, the lid and the cooling means.

The appliance according to claim 1 differs therefrom in the sense that the container is mounted to the structure for movement relative to the structure and the lid to open the container and afford access to its interior or to close the container, and wherein a majority of the external surfaces of the container is exposed to ambient air when the container is closed by the lid.

By exposing the external surface of the container to warmer air than it contains that surface is kept above the temperature at which significant condensation can occur. This is in contrast to prior art where the external surface of a drawer within a cooled compartment is exposed to ambient air only when the drawer is open and is therefore cold enough to risk condensation when the drawer is opened. In the invention, there is no problem with condensation on the external surface, and hence no problem with latent heat transfer to the container or the icing and difficulties with condensed water within the appliance.

The invention thus provides a cold-storage appliance having an ambient-exposed surface area enclosing a cooled compartment in which a majority of the ambient-exposed surface remains stationary when the compartment is opened by moving a minority of that surface area.

In respect of these advantages the features of claim 1 are not obvious so that the subject-matter of the claim fulfils the requirement of Article 33(3) PCT.

Claims 2 to 81 contain special embodiments of the subject-matter of claim 1 and also fulfil the requirement of Article 33(3) PCT.

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/GB00/03521

Section VIII:

Claim 82 contains a reference to the drawings. According to Rule 6.2(a) PCT, claims should not contain such references except where absolutely necessary, which is not the case here.

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference SPC/P8749W0	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 02/ 01155	International filing date (day/month/year) 13/03/2002	(Earliest) Priority Date (day/month/year) 13/03/2001
Applicant APPLIED DESIGN AND ENGINEERING LIMITED		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☒ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

4

☐ None of the figures.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 02/01155

Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

A cold-storage appliance (2) includes an open-topped insulating container (16) defining an external surface; an insulating lid (22) adapted to close the open top of the container (16); a cooling means (24) adapted to cool the interior of the container (16); and a structure (4,6) supporting the container (16), the lid (22) and the cooling means; wherein the container (16) is mounted to the structure (4) for movement relative to the structure (6) and the lid (22) to open the container (16) and afford access to its interior or to close the container (16). A circulating fan (340) or a heater (346) creating air currents to warm the external surfaces of the bin (16) warming of the external surfaces using heating elements (380).

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/01155

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F25D21/04 F25D25/00 F25D25/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F25D A47F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 223 234 A (STEMME CHARLES A) 26 November 1940 (1940-11-26) the whole document	1, 2
Y	US 1 337 696 A (EWEN MALCOLM F) 20 April 1920 (1920-04-20) cited in the application the whole document	1, 5-9, 13, 14
Y	US 2 460 469 A (STEPHEN SUTTON MYER ET AL) 1 February 1949 (1949-02-01) the whole document	1
Y	DE 11 29 972 B (BBC BROWN BOVERI & CIE) 24 May 1962 (1962-05-24) the whole document	5, 6
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

9 July 2002

Date of mailing of the international search report

17/07/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Busuiocescu, B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/01155

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 808 845 C (GUNNER JENSEN) 19 July 1951 (1951-07-19) the whole document ----	7-9, 13, 14
A	DE 42 37 293 A (LICENTIA GMBH) 11 May 1994 (1994-05-11) the whole document ----	14, 15
A	FR 2 777 985 A (GUICHON JEAN PIERRE) 29 October 1999 (1999-10-29) the whole document ----	
A	US 4 898 294 A (JENNINGS GARY K) 6 February 1990 (1990-02-06) the whole document ----	
A	EP 0 819 898 A (THERMOVONICS CO LTD) 21 January 1998 (1998-01-21) the whole document ----	
A	FR 933 333 A (BAIRD WILLIAM MCKINLEY) 16 April 1948 (1948-04-16) the whole document -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 02/01155

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2223234	A	26-11-1940	NONE	
US 1337696	A	20-04-1920	NONE	
US 2460469	A	01-02-1949	NONE	
DE 1129972	B	24-05-1962	NONE	
DE 808845	C	19-07-1951	NONE	
DE 4237293	A	11-05-1994	DE 4237293 A1	11-05-1994
FR 2777985	A	29-10-1999	FR 2777985 A1	29-10-1999
			AU 3154399 A	16-11-1999
			BR 9909843 A	19-12-2000
			CA 2329628 A1	04-11-1999
			CN 1301337 T	27-06-2001
			EP 1073871 A1	07-02-2001
			WO 9956071 A1	04-11-1999
			PL 343723 A1	10-09-2001
			TR 200003109 T2	21-02-2001
US 4898294	A	06-02-1990	NONE	
EP 0819898	A	21-01-1998	JP 9187262 A	22-07-1997
			JP 3202604 B2	27-08-2001
			JP 10030869 A	03-02-1998
			JP 10030870 A	03-02-1998
			AU 2867997 A	22-01-1998
			CN 1173654 A	18-02-1998
			EP 0819898 A2	21-01-1998
			US 6038865 A	21-03-2000
FR 933333	A	16-04-1948	NONE	

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference SPC/P8750W0	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 02/ 01158	International filing date (day/month/year) 13/03/2002	(Earliest) Priority Date (day/month/year) 13/03/2001
Applicant APPLIED DESIGN AND ENGINEERING LIMITED		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☒ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

2
☐ None of the figures.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 02/01158

Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

A cold-storage appliance (2) includes an open-topped insulating container (16) defining an external surface; an insulating lid (22) adapted to close the open top of the container (16); a cooling means (24) adapted to cool the interior of the container (16); and a structure supporting the container (16), the lid and the cooling means; wherein the container (16) is mounted to the structure (4) for movement relative to the structure (6) and the lid (22) to open the container (16) and afford access to its interior or to close the container (16). A cold-storage appliance with air transfer valves (352, 356) that mitigate the piston effect experienced when opening and closing a drawer (4). Bellows (374) attached to the drawers (4) to maintain a vapour barrier.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/01158

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F25D17/04 F25D21/04 F25D23/00 F25D25/02 F25D25/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F25D B65D B65G A47B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 440 296 A (WHIRLPOOL INT ;EURODOMESTICI IND RIUNITE (IT)) 7 August 1991 (1991-08-07) the whole document	1
Y	US 4 180 093 A (KAMEZAKI MASAOKI) 25 December 1979 (1979-12-25) the whole document	1
Y	DE 22 12 857 A (SIEMENS ELEKTROGERAETE GMBH) 27 September 1973 (1973-09-27) the whole document	14-17, 21, 22
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

9 July 2002

Date of mailing of the international search report

17/07/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Busuiocescu, B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/01158

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	PATENT ABSTRACTS OF JAPAN vol. 013, no. 487 (C-649), 6 November 1989 (1989-11-06) & JP 01 191618 A (MATSUSHITA ELECTRIC WORKS LTD), 1 August 1989 (1989-08-01) abstract ----	14-17, 21,22
Y	US 1 337 696 A (EWEN MALCOLM F) 20 April 1920 (1920-04-20) cited in the application the whole document ----	23,24
Y	DE 808 845 C (GUNNER JENSEN) 19 July 1951 (1951-07-19) the whole document ----	23,24
A	US 6 176 776 B1 (FINKELSTEIN BURL ET AL) 23 January 2001 (2001-01-23) the whole document ----	
A	FR 1 377 844 A (BRECONVUOT ANSTALT) 6 November 1964 (1964-11-06) the whole document ----	2
A	US 5 271 240 A (DETRICK ROBERT P ET AL) 21 December 1993 (1993-12-21) the whole document ----	
A	US 4 596 427 A (PFLUGFELDER KARL) 24 June 1986 (1986-06-24) the whole document -----	14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 02/01158

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0440296	A	07-08-1991	IT 1238452 B	18-08-1993
			DE 69101496 D1	05-05-1994
			DE 69101496 T2	01-09-1994
			EP 0440296 A1	07-08-1991
			US 5157940 A	27-10-1992
US 4180093	A	25-12-1979	NONE	
DE 2212857	A	27-09-1973	DE 2212857 A1	27-09-1973
JP 01191618	A	01-08-1989	NONE	
US 1337696	A	20-04-1920	NONE	
DE 808845	C	19-07-1951	NONE	
US 6176776	B1	23-01-2001	NONE	
FR 1377844	A	06-11-1964	NONE	
US 5271240	A	21-12-1993	NONE	
US 4596427	A	24-06-1986	DE 3300926 A1	19-07-1984
			JP 59145633 A	21-08-1984

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference SPC/P8748W0	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 02/ 01139	International filing date (day/month/year) 13/03/2002	(Earliest) Priority Date (day/month/year) 13/03/2001
Applicant APPLIED DESIGN AND ENGINEERING LIMITED		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.



It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.



the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :



contained in the international application in written form.



filed together with the international application in computer readable form.



furnished subsequently to this Authority in written form.



furnished subsequently to this Authority in computer readable form.



the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.



the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the title,

the text is approved as submitted by the applicant.



the text has been established by this Authority to read as follows:

5. With regard to the abstract,

the text is approved as submitted by the applicant.



the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the drawings to be published with the abstract is Figure No.

as suggested by the applicant.



because the applicant failed to suggest a figure.



because this figure better characterizes the invention.

6a, b _____



None of the figures.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 02/01139

Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

A cold-storage appliance (2) includes an open-topped insulating container (16) defining an external surface; an insulating lid (22) adapted to close the open top of the container (16); a cooling means (24) adapted to cool the interior of the container (16); and a structure supporting the container (16), the lid and the cooling means; wherein the container (16) is mounted to the structure (4) for movement relative to the structure (6) and the lid (22) to open the container (16) and afford access to its interior or to close the container (16). A major component to open or close the drawer (4) and a minor component (114) transverse to the major component to separate the drawer (4) from the lid (22) at opening.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 02/01139

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 F25D25/00 F25D25/02 F25D23/00 F25D11/00 F25D11/02 B65D88/12 B65G69/00																				
According to International Patent Classification (IPC) or to both national classification and IPC																				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 F25D B65D B65G A47B																				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched																				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ																				
C. DOCUMENTS CONSIDERED TO BE RELEVANT <table border="1"> <thead> <tr> <th>Category *</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>P, X</td> <td>WO 01 26532 A (TODD ROBERT WILLIAM ; FISHER & PAYKEL (NZ); MAUNSELL STEVE (NZ)) 19 April 2001 (2001-04-19) the whole document</td> <td>1, 42</td> </tr> <tr> <td>P, X</td> <td>WO 01 71263 A (BERTANI CARLO ; MO EL SRL (IT)) 27 September 2001 (2001-09-27) the whole document</td> <td>1-5, 42, 43</td> </tr> <tr> <td>X</td> <td>EP 0 518 183 A (BULTHAUP GMBH & CO) 16 December 1992 (1992-12-16) the whole document</td> <td>1, 3-5, 42, 44-47</td> </tr> <tr> <td>X</td> <td>US 2 894 845 A (STODDARD EDGAR S) 14 July 1959 (1959-07-14) the whole document</td> <td>1-4, 42, 43</td> </tr> <tr> <td colspan="2" style="text-align: center;">-/-</td> <td></td> </tr> </tbody> </table>			Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	P, X	WO 01 26532 A (TODD ROBERT WILLIAM ; FISHER & PAYKEL (NZ); MAUNSELL STEVE (NZ)) 19 April 2001 (2001-04-19) the whole document	1, 42	P, X	WO 01 71263 A (BERTANI CARLO ; MO EL SRL (IT)) 27 September 2001 (2001-09-27) the whole document	1-5, 42, 43	X	EP 0 518 183 A (BULTHAUP GMBH & CO) 16 December 1992 (1992-12-16) the whole document	1, 3-5, 42, 44-47	X	US 2 894 845 A (STODDARD EDGAR S) 14 July 1959 (1959-07-14) the whole document	1-4, 42, 43	-/-		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																		
P, X	WO 01 26532 A (TODD ROBERT WILLIAM ; FISHER & PAYKEL (NZ); MAUNSELL STEVE (NZ)) 19 April 2001 (2001-04-19) the whole document	1, 42																		
P, X	WO 01 71263 A (BERTANI CARLO ; MO EL SRL (IT)) 27 September 2001 (2001-09-27) the whole document	1-5, 42, 43																		
X	EP 0 518 183 A (BULTHAUP GMBH & CO) 16 December 1992 (1992-12-16) the whole document	1, 3-5, 42, 44-47																		
X	US 2 894 845 A (STODDARD EDGAR S) 14 July 1959 (1959-07-14) the whole document	1-4, 42, 43																		
-/-																				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.																				
* Special categories of cited documents : <table border="0"> <tr> <td style="vertical-align: top;"> *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed </td> <td style="vertical-align: top;"> *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family </td> </tr> </table>			*A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family																
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family																			
Date of the actual completion of the international search 9 July 2002		Date of mailing of the international search report 17/07/2002																		
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Busuiocescu, B																		

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 02/01139

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 440 296 A (WHIRLPOOL INT ;EURODOMESTICI IND RIUNITE (IT)) 7 August 1991 (1991-08-07) the whole document ----	1, 2, 42, 43
X	US 2 338 889 A (YOXSIMER ORLAND H) 11 January 1944 (1944-01-11) the whole document ----	1, 2, 42, 43
X	DE 29 18 222 A (ZIMMERMANN GOTTFRIED) 6 November 1980 (1980-11-06) the whole document ----	1, 42
A	US 5 178 655 A (SASSIER GERARD) 12 January 1993 (1993-01-12) the whole document ----	1, 42
A	US 2 942 926 A (PAVELKA JR JOSEPH) 28 June 1960 (1960-06-28) the whole document ----	
A	EP 0 405 680 A (EURODOMESTICI IND RIUNITE ;WHIRLPOOL INT (NL)) 2 January 1991 (1991-01-02) the whole document -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 02/01139

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0126532	A	19-04-2001	AU 7973300 A WO 0126532 A1	23-04-2001 19-04-2001
WO 0171263	A	27-09-2001	WO 0171263 A1 AU 3833900 A	27-09-2001 03-10-2001
EP 0518183	A	16-12-1992	DE 9107138 U1 AT 140133 T EP 0518183 A1	25-07-1991 15-07-1996 16-12-1992
US 2894845	A	14-07-1959	NONE	
EP 0440296	A	07-08-1991	IT 1238452 B DE 69101496 D1 DE 69101496 T2 EP 0440296 A1 US 5157940 A	18-08-1993 05-05-1994 01-09-1994 07-08-1991 27-10-1992
US 2338889	A	11-01-1944	NONE	
DE 2918222	A	06-11-1980	DE 2918222 A1 DE 2928653 A1	06-11-1980 12-02-1981
US 5178655	A	12-01-1993	FR 2658742 A1 AT 129138 T DE 69113912 D1 EP 0470240 A1 WO 9112762 A1 JP 4505415 T	30-08-1991 15-11-1995 23-11-1995 12-02-1992 05-09-1991 24-09-1992
US 2942926	A	28-06-1960	NONE	
EP 0405680	A	02-01-1991	IT 1230958 B AU 5797990 A EP 0405680 A2 US 5095717 A	08-11-1991 03-01-1991 02-01-1991 17-03-1992

INTERNATIONAL SEARCH REPORT

International Application No
PC1/GB 01/04117

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 E04H5/10 B65D88/12 B65G69/00 F25D25/00 F25D11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 E04H B65D B65G F25D B60P B66C B61D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 22 62 277 A (KAEFER ISOLIERTECHNIK) 27 June 1974 (1974-06-27)	1-4, 15, 18, 19, 35, 36, 39, 40, 43
Y	the whole document	5-14, 20-23, 26-30, 37, 38, 41, 42
Y	DE 28 23 048 A (DEMAG AG) 6 December 1979 (1979-12-06) the whole document	5, 6, 37, 38
Y	DE 36 31 591 A (KOCH & CO GEB) 16 July 1987 (1987-07-16) the whole document	7-9
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *A* document member of the same patent family

Date of the actual completion of the international search

21 December 2001

Date of mailing of the international search report

04/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 661 epo nl,
Fax (+31-70) 340-3018

Authorized officer

Busuiorescu, B

INTERNATIONAL SEARCH REPORT

Inte
nal Application No
PC 1/63 01/04117

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2 360 533 A (ZEIDLER KURT E) 17 October 1944 (1944-10-17) the whole document	10
Y	US 4 872 798 A (IDE ALLAN R) 10 October 1989 (1989-10-10) the whole document	11,12
Y	US 4 926 754 A (FEUZ FRITZ) 22 May 1990 (1990-05-22) the whole document	13,14
Y	EP 0 023 145 A (WILCOX LTD E M) 28 January 1981 (1981-01-28) the whole document	20,22,23
Y	US 3 481 503 A (KLOESS HANS K ET AL) 2 December 1969 (1969-12-02) the whole document	21
Y	EP 0 754 636 A (WALDNER GMBH & CO HERMANN) 22 January 1997 (1997-01-22) the whole document	26,27
X	US 2 077 739 A (BRYANT ROY B) 20 April 1937 (1937-04-20)	32-34
Y	the whole document	28-30, 41,42
A	DE 20 17 564 A (GOLD, ALFRED) 28 October 1971 (1971-10-28) the whole document	1
A	US 5 029 450 A (TAKANO YOSHIAKI ET AL) 9 July 1991 (1991-07-09) the whole document	1
A	US 3 907 147 A (GOOBECK ANDREW R) 23 September 1975 (1975-09-23) the whole document	5
A	US 4 365 484 A (CARSON ERNEST A ET AL) 28 December 1982 (1982-12-28) the whole document	24
A	DE 40 21 497 A (TELEFUNKEN ELECTRONIC GMBH) 9 January 1992 (1992-01-09) the whole document	
A	US 3 543 952 A (YOUNG ROBERT R) 1 December 1970 (1970-12-01) the whole document	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PC1/GB 01/04117

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 2262277	A	27-06-1974	DE 2262277 A1	27-06-1974
DE 2823048	A	06-12-1979	DE 2823048 A1	06-12-1979
DE 3631591	A	16-07-1987	DE 8600773 U1	27-03-1986
			DE 3631591 A1	16-07-1987
			US 4724648 A	16-02-1988
US 2360533	A	17-10-1944	NONE	
US 4872798	A	10-10-1989	US 5039275 A	13-08-1991
US 4926754	A	22-05-1990	AU 2966989 A	10-08-1989
			EP 0327882 A2	16-08-1989
			JP 1229759 A	13-09-1989
EP 0023145	A	28-01-1981	GB 2025594 A	23-01-1980
			AT 7445 T	15-06-1984
			DE 3067836 D1	20-06-1984
			EP 0023145 A1	28-01-1981
			ES 493559 D0	01-04-1981
			ES 8104117 A1	01-07-1981
			GB 2054812 A	18-02-1981
US 3481503	A	02-12-1969	FR 1562529 A	04-04-1969
			GB 1188881 A	22-04-1970
EP 0754636	A	22-01-1997	DE 19526510 A1	06-02-1997
			DE 59604735 D1	27-04-2000
			EP 0754636 A1	22-01-1997
US 2077739	A	20-04-1937	NONE	
DE 2017564	A	28-10-1971	DE 2017564 A1	28-10-1971
US 5029450	A	09-07-1991	JP 2889600 B2	10-05-1999
			JP 3070962 A	26-03-1991
			KR 150463 B1	02-11-1998
US 3907147	A	23-09-1975	NONE	
US 4365484	A	28-12-1982	AR 231511 A1	28-12-1984
			DE 3270053 D1	30-04-1986
			EP 0058821 A2	01-09-1982
			ES 509704 D0	16-06-1983
			ES 8307171 A1	16-10-1983
			MX 156334 A	10-08-1988
DE 4021497	A	09-01-1992	DE 4021497 A1	09-01-1992
US 3543952	A	01-12-1970	BE 730757 A	01-09-1969
			BE 730758 A	01-09-1969
			CA 973502 A2	26-08-1975
			CA 963819 A2	04-03-1975
			DE 1915737 A1	09-10-1969
			DE 1916461 A1	27-08-1970
			FR 2005088 A1	05-12-1969
			FR 2005089 A2	05-12-1969

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter. of Application No.

PC1/GB 01/04117

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3543952	A	GB 1267752 A	22-03-1972
		JP 51042393 B	15-11-1976
		JP 51038158 B	20-10-1976
		NL 6904866 A , B	01-10-1969
		SE 343540 B	13-03-1972
		SE 347492 B	07-08-1972
		US 3630402 A	28-12-1971
		US 3669288 A	13-06-1972
		US 3779403 A	18-12-1973



Application No: GB 0118281.5
Claims searched: 1-28

-65- Examiner: M C Monk
Date of search: 4 March 2002

Patents Act 1977 Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.T): F4H (H2A, H2L)

Int Cl (Ed.7): A47F (3/04, 3/06); F25D (25/00, 25/02)

Other: ONLINE DATABASES: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	EP 0440296 A1 WHIRLPOOL INTERNATIONAL See especially the arrangement shown in Fig.2, wherein the pins (40) on the lid (19) are able to slide in guide tracks (41), lifting the lid from the box part (18) of the container (17); consider movement of the lid described in ll.49-56 col 3 & ll.9-13 col 5 and claim 1.	1 at least

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



31.

Application No: GB 9921564.2
Claims searched: 1-60

Examiner: Kalim Yasseen
Date of search: 24 November 1999

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.Q): F4H (H2A, H2B, H2C, H2D, H2E, H2F, H2G, H2H, H2K, H2L, H2M)

Int Cl (Ed.6): A47F (3/04); F25D (13/00, 13/02, 13/04, 17/04, 19/02, 25/00, 25/02, 29/00)

Other: Online: EPODOC, JAPIO, WPI

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	GB 0 948 223 A (GENERAL) see container 46 with lid 48	
A	GB 0 602 329 A (GUYON) see insulated drawer 41 with cooling means 56 and lid 54	
A	US 5 120 118 A (RANKIN) a freezer having individual pull-out drawers	
A	US 4 317 607 A (GOMOLKA) a compartmented container	
A	US 4 085 986 A (TAUB) an auxiliary refrigerated display case	

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0106164.7
Claims searched: 41

Examiner: M C Monk
Date of search: 21 February 2002

Patents Act 1977
Further Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.T): F4H (H2A, H2L)

Int Cl (Ed.7): A47F (3/04); F25D (25/00, 25/02)

Other: ONLINE DATABASES: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
	NONE	

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0106164.7
Claims searched: 42 and 43

Examiner: M C Monk
Date of search: 21 February 2002

Patents Act 1977
Further Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.T): F4H (H2A, H2L)

Int CI (Ed.7): A47F (3/04); F25D (25/00, 25/02)

Other: ONLINE DATABASES: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	DE19546984 A HANS SIMON See EPODOC & WPI Abstracts. A device (4) seals the opening passage for the drawer (2), when the drawer is removed. The seal is attached to, and movable with, the drawer (20).	42

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0106164.7
Claims searched: 1-10

Examiner: M C Monk
Date of search: 17 May 2001

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.S): F4H (H2A, H2L)

Int Cl (Ed.7): A47F (3/04, 3/06); F25D (25/00, 25/02)

Other: ONLINE DATABASE: WPI EPODOC JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	EP 0440296 A1 WHIRLPOOL INTERNATIONAL See especially the arrangement shown in Fig.2, wherein the pins (40) on the lid (19) are able to slide in guide tracks (41), lifting the lid from the box part (18) of the container (17).	1,2,5 at least.

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0106164.7
Claims searched: 11-24

Examiner: M C Monk
Date of search: 17 May 2001

Patents Act 1977
Further Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.S): F4H (H2A, H2L)

Int Cl (Ed.7): A47F (3/04, 3/06); F25D (25/00, 25/02)

Other: ONLINE DATABASE: WPI EPODOC JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	EP 0440296 A1 WHIRLPOOL INTERNATIONAL See especially the arrangement shown in Fig.2, wherein the pins (40) on the lid (19) are able to slide in guide tracks (41), lifting the lid from the box part (18) of the container (17); consider movement of the lid described in ll.49-56 col 3 & ll.9-13 col 5 and claim 1.	11 at least

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0106164.7
Claims searched: 25

63
Examiner: M C Monk
Date of search: 17 May 2001

Patents Act 1977
Further Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.S): F4H (H2A, H2L)

Int CI (Ed.7): A47F (3/04, 3/06); F25D (25/00, 25/02)

Other:

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	GB 2354061 A IAN DAVID WOOD See Fig. 4, circulating air 'at ambient temperature'.	

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



Application No: GB 0106164.7
Claims searched: 26-32

64
Examiner: M C Monk
Date of search: 17 May 2001

Patents Act 1977
Further Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
UK Cl (Ed.S): B8P (PV); F4H (H3)
Int Cl (Ed.7): B65D (21/02, 43/00); F25D (3/00, 3/06, 3/08)
Other: ONLINE DATABASE: WPI EPODOC JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	GB 2154553 A ENRIQUE XUFRE GODA YOL Stackable containers (61) are configured to provide air-flow spaces between the base of an upper container and the lid of a lower container.	26-31
X	GB 1484282 LUCAS See eg 1.89 p.4 to 1.6 p.5 regarding air channels (91,91) and spaced slots (96).	26,27
X	GB 1143929 BUXTED CHICKEN COMPANY Example of a shaped stackable container including air flow channels.	26
X	GB 418489 MORRIS HEATING APPLIANCES See eg Fig.1 and the ribbing of the walls and cover.	26

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0106164.7
Claims searched: 33-37

63
Examiner: M C Monk
Date of search: 17 May 2001

Patents Act 1977 Further Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
UK CI (Ed.S): F4H (H10)
Int CI (Ed.7): F25D (17/00, 17/06, 17/08)
Other: ONLINE DATABASE: WPI EPODOC JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	US 4899554 SANDEN CORPORATION See especially Figs.3 & 5 which both show a common refrigeration means (51') for a plurality of spaces (11a-c); the temperature in each air circulation passage for each space is individually controlled.	33

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0106164.7
Claims searched: 38-40

64
6
Examiner: M C Monk
Date of search: 17 May 2001

Patents Act 1977
Further Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.S): F4H (HGXD)

Int CI (Ed.7): F25B (1/10)

Other: ONLINE DATABASE: WPI EPODOC JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	EP 0080916 A1 FROID SATAM BRANDT Four compressors (1-4) of different capacity connected in parallel. See accompanying abstract.	38-40
A	US 5927088 DAVID N SHAW Booster compressor (22), primary compressor (24).	
X	See EPODOC & WPI Abstracts for DE 3126325 A (KULMBACHER). Compressors (2,3) of different outputs, are connected in parallel, and can be operated together or independently.	38-40
X	WPI & JAPIO Abstracts for JP 11193966 A (TOKYO GAS) Large volume compressor (1), small volume compressor (11).	38 at least
X	WPI & JAPIO Abstracts for JP 10220884 A (HITACHI) Large capacity compressor (1), small capacity compressor (2).	38 at least
X	JAPIO Abstract for JP 1262390 A (SANYO ELECTRIC) Compressors (1,2) of different capacities; switch (15).	38-40
X	JAPIO Abstract for JP 1262387 A (MITSUBISHI ELECTRIC) Three compressors (1b-d) all of different capacity.	38 at least

X Document indicating lack of novelty or inventive step
Y Document indicating lack of inventive step if combined with one or more other documents of same category.
& Member of the same patent family

A Document indicating technological background and/or state of the art.
P Document published on or after the declared priority date but before the filing date of this invention.
E Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0106164.7
Claims searched: 38-40

67

Examiner: M C Monk
Date of search: 17 May 2001

Category	Identity of document and relevant passage	Relevant to claims

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0106164.7
Claims searched: 44-62

Examiner: M C Monk
Date of search: 17 May 2001

Patents Act 1977 Further Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.S): B7B (BAC); B8P (PK7); F4H (H1G)

Int Cl (Ed.7): B60J (7/02, 7/04); B60P (1/54, 3/20); B65D (88/12);
F25D (11/00, 19/00)

Other: ONLINE DATABASE: WPI EPODOC JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	GB 2317595 A ANTHONY PETER HOYNE Goods vehicle with a hinged cover (10)	44,49,50 at least
X	GB 2197639 A COBRA CONTAINERS SPA Loading hatches (2).	44,49 at least
X	GB 1551044 SEA CONTAINERS LTD See especially Fig.2 and removable lid (30).	44 at least
X	GB 1188881 HANS KARL KLOESS Open-topped container (see ll.9-14 p.1) includes a detachable lid (6) with a rubber seal (22).	44,49 at least
X	GB 642475 INDUSTRIAL PATENTS CORP. Insulated cover (23).	44,59,60 at least.
X	WO 85/00422 A1 FREDRIXON An example of an overhead carriage for use in loading and unloading goods stored in containers having a removable lids (13).	59 at least

X Document indicating lack of novelty or inventive step
Y Document indicating lack of inventive step if combined with one or more other documents of same category.

& Member of the same patent family

A Document indicating technological background and/or state of the art.
P Document published on or after the declared priority date but before the filing date of this invention.
E Patent document published on or after, but with priority date earlier than, the filing date of this application.



INVESTOR IN PEOPLE

Application No: GB 0106164.7
Claims searched: 63-65

69
Examiner: M C Monk
Date of search: 17 May 2001

Patents Act 1977 Further Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.S): F4H (HGXC, HGXC)

Int Cl (Ed.7): F25B (49/02); F25D (11/02, 13/04, 29/00)

Other: ONLINE DATABASES: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	US 5377498 WHIRLPOOL CORPORATION Consider whole document; see eg ll.24-35 col 2 & ll.24-53 col 3; the temperature of the evaporator is controlled for refrigeration or freezing as required.	63
A	US 5921095 LG ELECTRONICS Example of a refrigerator having a variable number of refrigeration or freezer compartments.	

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

TENT COOPERATION TRE, Y

PCT

NOTIFICATION OF THE RECORDING
OF A CHANGE(PCT Rule 92bis.1 and
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

CUMMINGS, Sean, Patrick
David Keltie Associates
12 New Fetter Lane
London EC4A 1AG
ROYAUME-UNI

Date of mailing (day/month/year) 20 June 2001 (20.06.01)	IMPORTANT NOTIFICATION
Applicant's or agent's file reference SPC/P5099WO	
International application No. PCT/GB00/03521	International filing date (day/month/year) 13 September 2000 (13.09.00)

1. The following indications appeared on record concerning:	
<input checked="" type="checkbox"/> the applicant	<input type="checkbox"/> the inventor
<input type="checkbox"/> the agent	<input type="checkbox"/> the common representative
Name and Address	State of Nationality
	State of Residence
	Telephone No.
	Facsimile No.
2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:	
<input checked="" type="checkbox"/> the person	<input checked="" type="checkbox"/> the name
<input checked="" type="checkbox"/> the address	<input checked="" type="checkbox"/> the nationality
<input checked="" type="checkbox"/> the residence	
Name and Address APPLIED DESIGN AND ENGINEERING LIMITED 5 Tower Road Lowestoft Suffolk NR33 7NG United Kingdom	State of Nationality GB
	State of Residence GB
	Telephone No.
	Facsimile No.
3. Further observations, if necessary: New applicant for all designated states. WOOD, Ian David should now be listed as applicant and inventor for US only.	
4. A copy of this notification has been sent to:	
<input checked="" type="checkbox"/> the receiving Office	<input checked="" type="checkbox"/> the designated Offices concerned
<input type="checkbox"/> the International Searching Authority	<input type="checkbox"/> the elected Offices concerned
<input type="checkbox"/> the International Preliminary Examining Authority	<input type="checkbox"/> other:

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer I. Britel
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner
 US Department of Commerce
 United States Patent and Trademark
 Office, PCT
 2011 South Clark Place Room
 CP2/5C24
 Arlington, VA 22202
 ETATS-UNIS D'AMERIQUE
 in its capacity as elected Office

Date of mailing (day/month/year) 14 May 2001 (14.05.01)	Applicant's or agent's file reference SPC/P5099WO
International application No. PCT/GB00/03521	Priority date (day/month/year) 13 September 1999 (13.09.99)
International filing date (day/month/year) 13 September 2000 (13.09.00)	
Applicant WOOD, Ian, David	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:
 28 March 2001 (28.03.01)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer Pascal Piriou Telephone No.: (41-22) 338.83.38
---	---